

### APPLICATIONS

Premium grade LED industrial fixture. For use in indoor applications such as factories, warehouses, workshops, garages and utility areas where concentrated light output is required.

### FEATURES & BENEFITS

- ◆ Single unit or continuous row mounting capability
- ◆ Versatile end plates doubles as coupler for precise continuous row mounting
- ◆ Available in 4 ft & 8 ft lengths (consult for other options)
- ◆ Surface, stem or chain mountable
- ◆ <sup>c</sup>ETL<sub>US</sub> listed for damp location
- ◆ Min CRI 82

### SPECIFICATIONS

Housing is die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Versatile end plate doubles as coupler for continuous row mounting. Single piece reflector. Knockouts are provided for flexible conduit attachment. <sup>c</sup>ETL<sub>US</sub> listed for damp location.



### ORDERING DATA

**EXAMPLE: 1-48LED48DMV40**


1	LED																																			
Series	Size		Gear	Wattages/Lumens		Driver		Color Temp		Options																										
1 Strip Industrial Hooded	48	48" long	LED	<u>4 Ft.</u>		DMV	120-277V Multivolt 0-10V Dimmable	30	3000K	OS	Occupancy Sensor																									
				24	24 Watts							3475 Lumens	SDMV	Step dimming Multivolt	35	3500K	CS	Cord 18/3 6'																		
				30	30 Watts							4310 Lumens							DHV	347-480VAC 0-10V Dimming	40	4000K	EM	Emergency Battery Pack 10W ~ 1700 Lumens												
				35	35 Watts							4920 Lumens													D347V	347VAC 0-10V Dimming	50	5000K	EM7	Emergency Battery Pack 7W ~ 1300 Lumens						
				48	48 Watts							6475 Lumens																			TDMV	Triac Dimming 120-277VAC			EM5	Emergency Battery Pack 5W ~ 850 Lumens
				57	57 Watts							7755 Lumens																								
	<u>8 Ft.</u>		70	70 Watts	9840 Lumens	D277	Triac Dimming 277VAC																													
	24	24 Watts									3475 Lumens																									
	48	48 Watts									6475 Lumens																									
	57	57 Watts									7755 Lumens																									
	70	70 Watts									9840 Lumens																									
	97	97 Watts									12950 Lumens																									
118	118 Watts	15510 Lumens																																		

\*See chart below for whip & cord ordering options

### ACCESSORIES

Accessories Sold Separately

A71-Wire Guard - (order 2 for 8ft. Fixture)

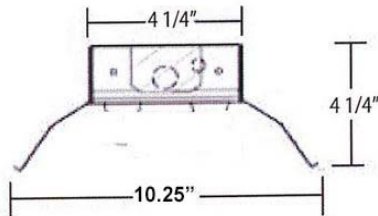

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	Plug		277 - 277V	
	6 - 6 Wire	12 - 12 feet	TL* - Twist Lock		347 - 347V	
		15 - 15 feet			480 - 480V	

Lumens are subject to a tolerance of  $\pm 10\%$   
 Wattage is approximate and subject to a tolerance of  $\pm 5\%$  and is subject to environmental factors.  
 Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE