

## APPLICATIONS

Premium grade industrial fixture. For use in indoor applications such as factories, warehouses, workshops, garages and utility areas where concentrated light output is required.

## FEATURES & BENEFITS

- ◆ Single or row mounting capability
- ◆ Versatile end plates doubles as coupler for precise continuous row mounting
- ◆ Surface, stem or chain mountable
- ◆ Optional upright reflectors available. Add 'UP' after lamp type.
- ◆ Wire guards available
- ◆ **UL** listed for damp location

## SPECIFICATIONS

Housing is die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Versatile end plate doubles as coupler for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears **UL** label.



## ORDERING DATA

**EXAMPLE: 1-132MVB1**

Series	# of Lamps	Lamp Type	Reflector	Ballast Type	Options*	
1	1	14 22" T5	Blank Solid	MV Multivolt 120-277	B1 T8/T5 1L 500 Lumens Battery Backup (B11)	
Premium Industrial	2	17 24" T8	Reflector	R120 Residential 120	B2 T8/T5 1L/2L 700 Lumens Battery Backup (B48)	
	3	21 34" T5	Up 15% Up Light	PMV Program Multivolt	B3 T8/T5 1L/2L 1400 Lumens Battery Backup (B223)	
	4	22	22" T5HO		DMV Dimming MV	B51 T5HO 1L 500 Lumen Battery Backup (B625)
		25	36" T8		LED** Wired 1 end hot for T8 LED tubes	B52 T5HO 1L 800 Lumens Battery Backup (B585)
	25TAN	2-36" TAN T8		LED2E** Wired 2 ends hot for T8 LED tubes	B53 T5HO 1L 1300 Lumens Battery Backup (B626)	
	28	46" T5			OS Occupancy Sensor	
	28TAN	2-46" TAN T5			11 Dual Ballasts 1 Lamp + 1 Lamp	
	32	48" T8			21 Dual Ballasts 2 Lamp + 1 Lamp	
	32TAN	2-48" TAN T8			22 Dual Ballasts 2 Lamp + 2 Lamp	
	39	33" T5HO			31 Dual Ballasts 3 Lamp + 1 Lamp	
	54	46" T5HO			RIF Radio Interference Filter	
	54TAN	2-46" TAN T5HO			WP Whip 6 FT 3 Wire	
	96T8HO	96" T8HO			WP4 Whip 6FT 4 Wire	
	96T8	96" T8			XS Silver MIRO4 Reflector	
					XSN Narrow Silver MIRO4 Reflector (10")	

\*\* Assembled with no ballast, made for UL listed, self ballasted retrofit LED lamps. For UL Listed version, see EZ-LED

Battery Backup (#) if ordering separately  
\*Call factory for additional options  
\*Lamps purchased separately

## ACCESSORIES

- A71 - 1 and 2 lamp wireguards 4ft
- A72 - 3 and 4 lamp wireguards 4ft
- \*Order 2 for 8ft unit

\*\*See chart below for whip & cord ordering options

**\*\*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)**

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	

### Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal


### Performance Levels

Ballast			
Manufacturer	Standard	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)


## DIMENSIONS

### END VIEWS

1 and 2 Light




3 and 4 Light

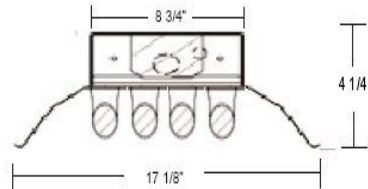


### END VIEWS -XSN

1 and 2 Light

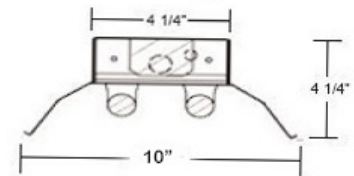

### REFLECTOR STYLES

ALL Series 1 strips are full 2, 3, 4, 6 or 8 ft lengths Including T5 & T5HO

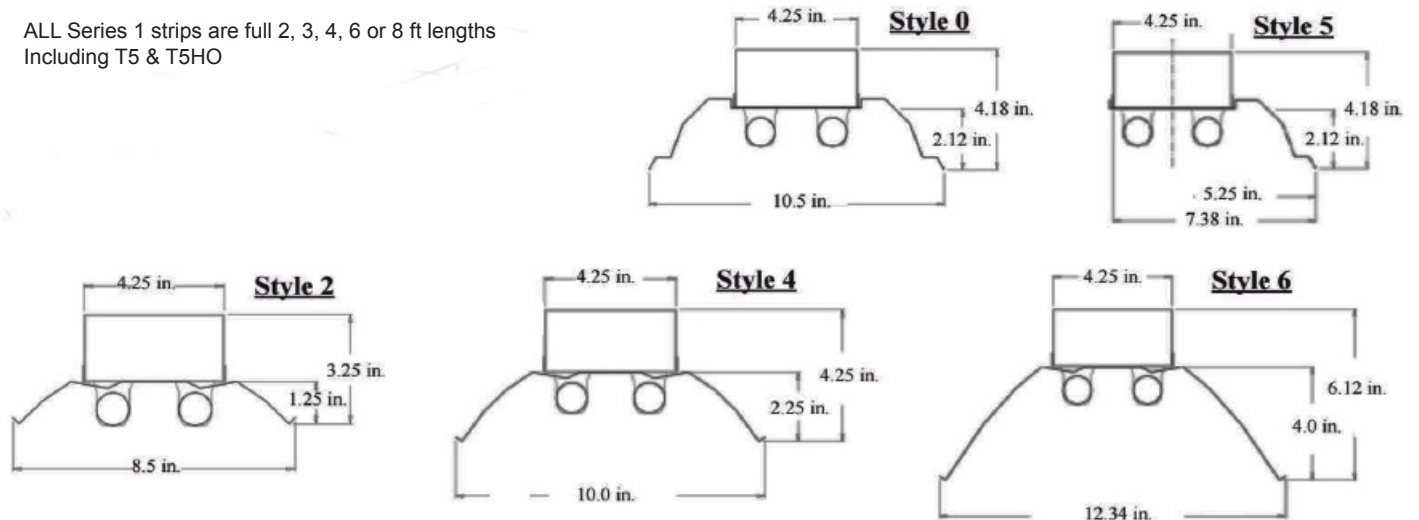

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE