


Installation Instruction for LED

Removal of existing components

1. Shut off line power to the fixture at the breaker panel.
2. Disconnect and remove existing T8 lamps and discard as recommended by the provider, as they may contain mercury.
3. Remove ballast cover and set aside.
4. Break the mate on the yellow disconnect to cutoff the ballast from the line wires.

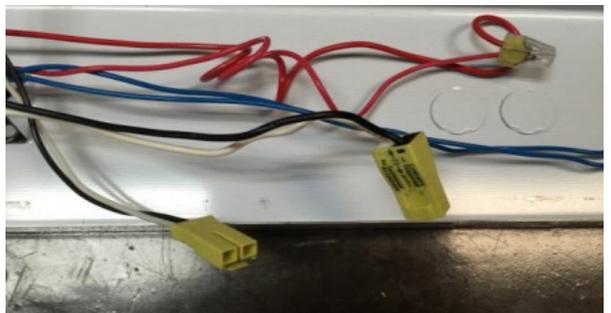

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	

5. Pinch and push on the sockets to remove. Remove all four and let them hang.




6. Unfasten screws holding down ballast. Remove ballast and sockets at once. Discard according to manufacturer's recommendation.

Alternatively, it is possible to cut the wires connecting the sockets to the ballast. Follow warnings printed below before proceeding.



Installation of Retrofit Kit

7. Insert retrofit sockets in place of the previously removed sockets.

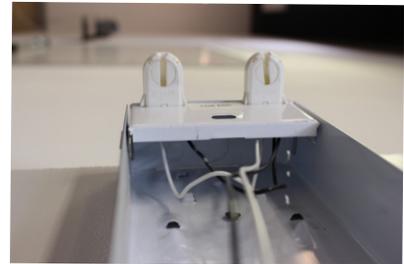

8. Reconnect the existing half of the yellow disconnect from the ceiling to the new retrofit disconnect.



Dimensions and specifications subject to change without notice.



Installation Instruction for LED-2E

Removal of existing components


1. Shut off line power to the fixture at the breaker panel.
2. Disconnect and remove existing T8 lamps and discard as recommended by the provider, as they may contain mercury.



3. Remove ballast cover and set aside.



4. Break the mate on the yellow disconnect to cutoff the ballast from the line wires.

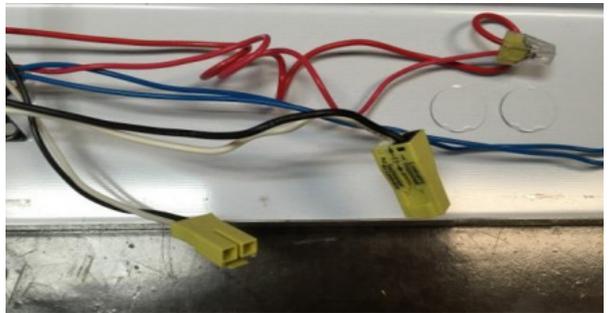

Dimensions and specifications subject to change without notice.



5. Pinch and push on the sockets to remove. Remove all four and let them hang.



6. Unfasten screws holding down ballast. Remove ballast and sockets at once. Discard according to manufacturer's recommendation.

Alternatively, it is possible to cut the wires connecting the sockets to the ballast. Follow warnings printed below before proceeding.



Installation of Retrofit Kit

7. Insert retrofit sockets in place of the previously removed sockets.



8. Reconnect the existing half of the yellow disconnect from the ceiling to the new retrofit disconnect.



Dimensions and specifications subject to change without notice.

