


APPLICATIONS

Sub-miniature strip to illuminate tight spaces. Ideal for display and shelf lighting. Fixtures may be used individually, or linked, end to end, without cords

FEATURES & BENEFITS

- ◆ 0.9"W x 1.7"H (23x43mm) - dimensions include lamp and lens
- ◆ Sub-miniature housing for tight spaces
- ◆ Fixtures link without cords for continuous row mounting
- ◆ Cord, mounting hardware, lamp shipped as a single piece
- ◆ Surface mount brackets, included
- ◆ Surface, stem or chain mountable
- ◆ UL listed

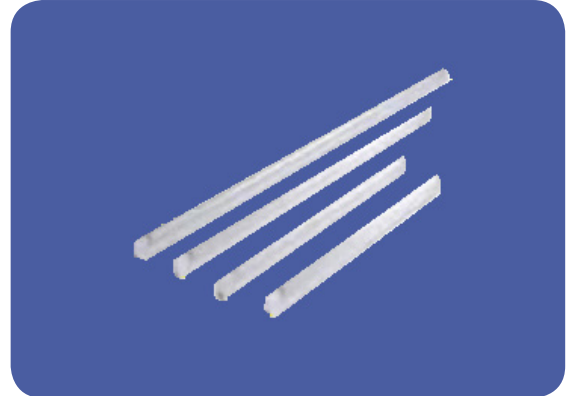

SPECIFICATIONS

Metal construction with acrylic diffuser. Each double insulated fixture is provided with a two prong cord and mounting hardware. Fixtures may be linked (plugged directly, one into another) without a cord for continuous rows. Six inch accessory cord is also available for continuous power around corners.

ORDERING DATA

EXAMPLE: 10M108ELLI

10M	1			
Series	# of Lamps	Lamp Type	Ballast	Lamp Type
10M Sub-miniature strip, Linked	1 (Lamp Included)	08 13 14 21 28	EL 120V Electronic Ballast	LI 8W Installed, 4100K, Fixture length = 13.5" LI 13W Installed, 4100K, Fixture length = 22.5" LI 14W Installed, 4100K, Fixture length = 23.7" LI 21W Installed, 4100K, Fixture length = 35.6" LI 28W Installed, 4100K, Fixture length = 47.4"

Two prong power cord, lamp, and mounting hardware included with each fixture. DEDJ Box required for hardware

ACCESSORIES



DED/6 - JOIN
6 in. cord to join fixture to fixture

Dimensions and specifications subject to change without notice.

CAT#	
JOB NAME	TYPE