

### APPLICATIONS


Full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the LED the matte white diffuser surrounds the diodes for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineered cable mounting kit.

### FEATURES & BENEFITS

- ◆ Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- ◆ Clean body - No knock-outs on sides or ends.
- ◆ Knockouts on back accept standard electrical fittings (by others). Consult factory for other locations.
- ◆ Surface mount or pendant mount; horizontal or vertical
- ◆ L70 ≥ 60,000hrs Min 80CRI
- ◆ cETL<sub>us</sub> Listed



SQUARED

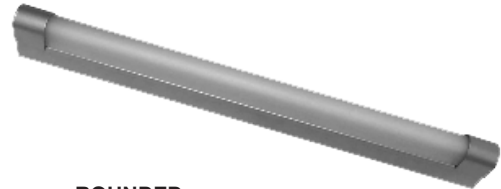

ROUNDED

### ORDERING DATA


EXAMPLE: 10T5-36LED12SWDMVWH40

LED										
Series	Width	Length	Gear	Wattage/Lumens	Lens	Driver	Finish	Color Temp	Options <sup>1</sup>	
<b>10T5</b>	(Blank) 2"	24 22.5"	LED	<b>24 (2" Wide)</b>	SW Smooth White	DMV 120-277V Multivolt 0-10V Dimmable	WH White	30 3000K	CS 6' Cord	
Rounded LED Surface Mount	3"	36 34.5"		12 12 Watts 1080 Lumens	FR Frosted	SDMV Step dimming Multivolt	BK Black	35 3500K	SS Integrated Sensor	
<b>10T5S</b>		48 46.25"		18 18 Watts 1700 Lumens		DHV 347-480VAC 0-10V Dimming	BN Brushed Nickel	40 4000K		
Squared LED Surface Mount		96 92"		<b>24 (3" Wide)</b>		D347V 347VAC 0-10V Dimming	BZ Bronze	50 5000K		
				24 24 Watts 2160 Lumens		D120 Triac Dimming 120VAC	SI Silver			
				28 28 Watts 2700 Lumens		D277 Triac Dimming 277VAC				
				35 35 Watts 3400 Lumens						
				<b>36 (2" Wide)</b>						
				22 22 Watts 1600 Lumens						
				29 29 Watts 2755 Lumens						
				36 36 Watts 3240 Lumens						
				<b>36 (3" Wide)</b>						
				44 44 Watts 4180 Lumens						
				58 58 Watts 5510 Lumens						
				<b>48 (2" Wide)</b>						
				24 24 Watts 2160 Lumens						
				28 28 Watts 2520 Lumens						
				35 36 Watts 3240 Lumens						
				<b>48 (3" Wide)</b>						
				32 32 Watts 2880 Lumens						
				40 40 Watts 4000 Lumens						
				48 48 Watts 4320 Lumens						
				57 57 Watts 5400 Lumens						
				72 72 Watts 7000 Lumens						
				<b>96 (2" Wide)</b>						
				32 32 Watts 3200 Lumens						
				48 48 Watts 4320 Lumens						
				57 57 Watts 5400 Lumens						
				72 72 Watts 6480 Lumens						
				<b>96 (3" Wide)</b>						
				80 80 Watts 8000 Lumens						
				114 114 Watts 10250 Lumens						
				144 144 Watts 12960 Lumens						

### ACCESSORIES

- A-HC501WH5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable  
Cable included w/ white canopy
- A-HC501BN5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable  
Cable included w/ brushed nickel canopy

Note:  
1. Consult factory for other options

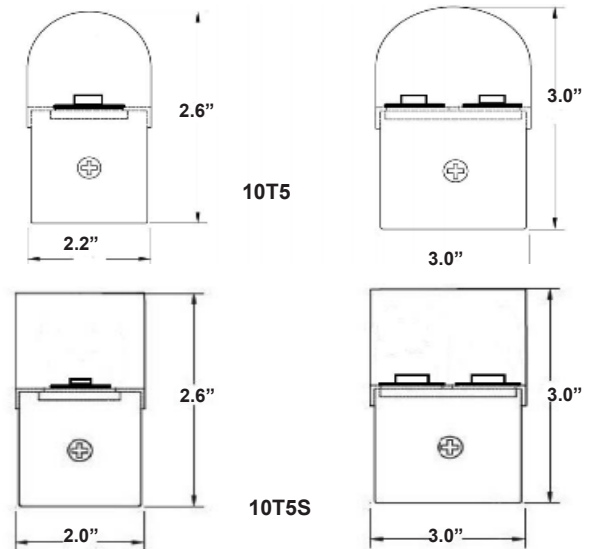

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	