


What is a NEMA "G" (Grid) fixture?
All Mobern Lighting grid fixtures (NEMA TYPE "G") are designed to fit securely into a standard NEMA Type "G", 1" nominal T-bar system

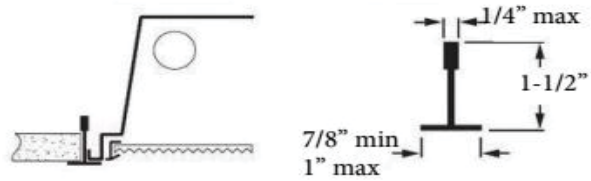

**** Installation of these products should only be performed by a qualified electrician.****


1. Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:

- a. Raise the fixture through the ceiling opening and rest the fixture in the grid system.
- b. Center the fixture within the opening.
- c. Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
- d. Refer to local codes for other installation requirements.

2. Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections:

- a. Remove access plate on the back of the fixture (see illustration below).
- b. Remove ballast supply wires from access plate.
- c. Make wire connections in accordance with local codes. Ground screw is provided on access plate.
- d. Re-install access plate.
- e. For models with luminaire disconnect pre-wired to ballast insert the white supply wire into one of the two white ports in the open end of the disconnect. Insert the Black hot supply wire into one of the two black ports in the open end of the disconnect.

Access Plate
w/(2) 7/8" K.O.'s

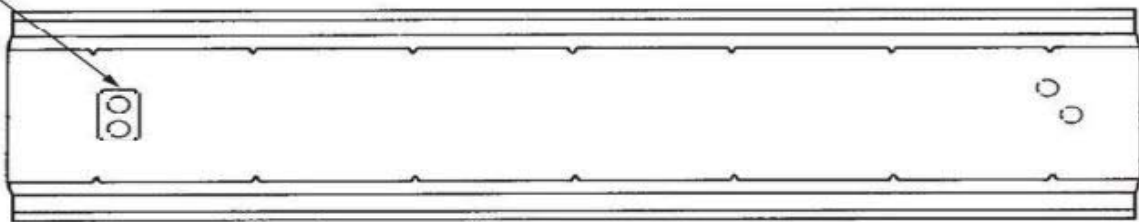

NOTE: Refer to individual product specification sheets for further information