


155 SERIES

Multi-Purpose Bracket

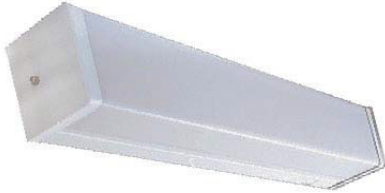

The Mobern Series 155 is a commercial grade narrow surface mounted bracket luminaire for use in indoor applications such as bathrooms, stairwells, hallways and other areas requiring a multi-purpose fixture

- Prismatic wraparound diffuser with an optional white lens
- Screw fastened end caps secure diffuser in place
- Individual or continuous row application
- Optional chrome fixture finishes available
- UL listed for damp location
- Clear acrylic prismatic lens with linear ribbed sides standard

CONSTRUCTION

Housing and end caps are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Diffuser is held in place on both ends by screw fastened end caps for a clean look and for easy access to the fixture during maintenance. End caps may be removed for continuous row mounting with the use of optional contour band. Mounts over electrical junction box. Mounting holes are provided. Soft matte opal white acrylic diffuser provides an even illumination.

SIZE W x L x H in inches (mm)
5.62"W x 48"L x 4.5"H

The most economical, practical, and user friendly series of LED fixtures with energy savings, quality of light, long life and hassle-free maintenance/ EZLED fixtures are UL listed with the latest LED T8 bypass lamps. These fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required). They also provide the flexibility to change the wattage and color temperature at any time. Are you concerned about maintenance with an LED array and driver fixture? EZLED resolves that issue by utilizing a self-contained LED lamp that fits into your fixture just like the classic fluorescent tube. The fixture performance will evolve over time with the evolution of the T8 LED lamp technology, and our five-year warranty guarantees a reliable, high quality product.

Lamp Specifications

Our EZLED fixtures come standard with SaveGreen T8 LED lamps. They are available in 2 or 4 foot sizes in different wattage, lumens, and color temperature options (see lamp options and specifications at www.savegreenlighting.com).

- L70 > 50000 hrs.
- Operating temperature: -20°C to 50°C
- Color Temperature: 3500K, 4000K, 5000K
- G13 pins (same as fluorescent linear T8 bipin)
- AC100-277V
- Integral driver (non-isolated) eliminates the need for external driver or ballast
- Environmentally friendly, no mercury used
- UL Classified
- Min CRI 80
- 5 year warranty

Optional Dimming

The 4 foot lamps are available with a dimming option. Specially designed dimming lamps require an external driver that runs 1 or 2 lamps (more than 2 lamps require multiple external drivers).

Emergency Options

The standard EZLED lamps require an inverter or an all-in-one emergency kit that includes LED array, battery, and driver. Dimmable T8 LED with external driver works with standard LED EM in it.

ORDERING DATA

EXAMPLE: 155-232LEDL15W840LUN

155

Series	# Lamps	Lamp Type	Finish*	Lamp Wattage**	Color Temp	Lamp Brand	Options
155 Multipurpose Bracket	1	1 Lamp	(Blank) White (Standard)	2 ft.	830 3000K 835 3500K 840 4000K 850 5000K	Blank House Brand Lamp (Savegreen)	WP 6' Whip 3 Wire
	17	24 inch T8		LEDL7W 7 Watts 950 Lumens Keystone			
	2	2 Lamps	*Consult for other finish options	4 ft.		LUN Lunera Brand KEY Keystone Brand JAM James Brand**	OA Opal acrylic lens
	32	48 inch T8		LEDL9W 9 Watts 1150 Lumens Lunera			
				LEDL12W 12.5 Watts 1750 Lumens Keystone			**Special Order
				LEDL15W 15 Watts 1850 Lumens Lunera			
				LEDL15W 15 Watts 1740 Lumens			
				LEDL18W* 18 Watts 2500 Lumens			

**Premium lamp option



Dimensions and specifications subject to change without notice.

800-444-WATT | www.mobern.com
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE