

APPLICATIONS

Stylish ceiling/wall mounted luminaire in either white or walnut finish with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays.

FEATURES & BENEFITS

- ◆ Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation
- ◆ Clear acrylic prismatic lens with linear ribbed sides standard
- ◆ White with a variety of LED combinations
- ◆ Overlapping end caps for uniformity and dimensional stability
- ◆ Min CRI 80
- ◆ _{us} ETL Listed for damp locations




SPECIFICATIONS

All metal parts are die formed from heavy gauge cold roll steel with overlapping end caps. Diffuser is a linear sided prismatic lens of extruded acrylic for controlled light.

ORDERING DATA

EXAMPLE: 155-24LED24DMVWH40

Series	Size	LED Gear	Wattage / Lumens	Driver	Finish	Color Temp	Options
155	24 24 inches 48 48 inches	LED	2 ft. 24 24 Watts 2900 Lumens 28 28 Watts 3400 Lumens 35 35 Watts 3200 Lumens 4 ft. 30 30 Watts 4065 Lumens 48 48 Watts 5985 Lumens 57 57 Watts 6855 Lumens 72 72 Watts 7000 Lumens	DMV 120-277V Multivolt 0-10V Dimmable Step dimming SDMV Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	WH White (Standard) **Consult factory for other finish options	30 3000K 35 3500K 40 4000K 50 5000K	WP 6' Whip 3 Wire Consult factory for other options OA Opal acrylic lens

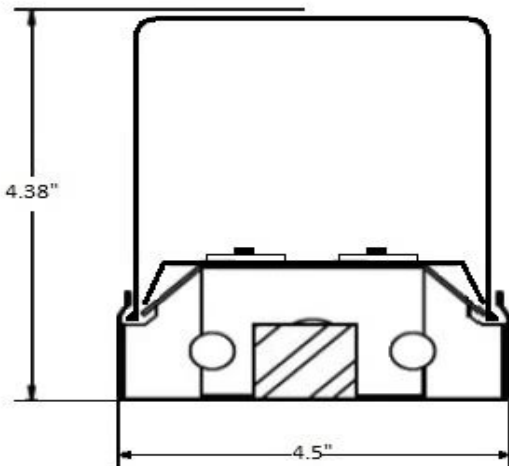

DLC Listed (4 ft DMV only)	
155-48LED30DMVWHxx	XX=30, 35,40, 50
155-48LED48DMVWHxx	XX=30, 35,40, 50
155-48LED57DMVWHxx	XX=30, 35,40, 50

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	