

APPLICATION

Specification grade, wall mounted valance luminaire. Designed for restrooms, as a backlight for hospitals, nursing homes and other patient care facilities. Designed as a valance light in public, institutional and sports facilities.

FEATURES & BENEFITS

- ◆ **Technology - Post Powder Paint**
- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Heavy duty construction
- ◆ Optional finishes: post powder coated white, post powder coated black
- ◆ Lens options: clear prismatic with ribbed front, clear ribbed upright acrylic
- ◆ Uplight fixture with divider and uplight acrylic optional feature
- ◆ **UL** Listed for damp location



SPECIFICATIONS





Housing and end are die-formed corrosive resistant code gauge cold rolled steel. Reflective areas are powder coated with high reflectant white paint for improved efficiency. Mounts over electrical junction box. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: 159-217MV

| Series | # of Lamps | Lamping | Ballast Type | Options |
|------------|------------|-------------|---------------------------------|--------------------------------------|
| 159 | | | | |
| 159 | 1 1 lamp | 14 T5 22" | MV Multi-volt | Blank White finish |
| Wall Mount | 2 2 lamp | 17 T8 24" | LED** Wired 1 end hot for T8 | B Black finish |
| Bed Light | 3 3 lamp | 24 T5HO 22" | LED** Wired 2 ends hot for T8 | CP Clear prismatic with ribbed front |
| | | 25 T8 36" | LED tubes | CR Clear ribbed upright acrylic |
| | | 28 T5 46" | LED2E** Wired 2 ends hot for T8 | UP Uplight fixture |
| | | 32 T8 48" | LED tubes | * Call for additional options |
| | | 54 T5HO 46" | | |

** Assembled with no ballast, made for UL Listed, self-ballasted retrofit LED Lamps

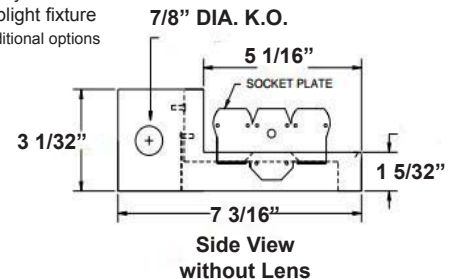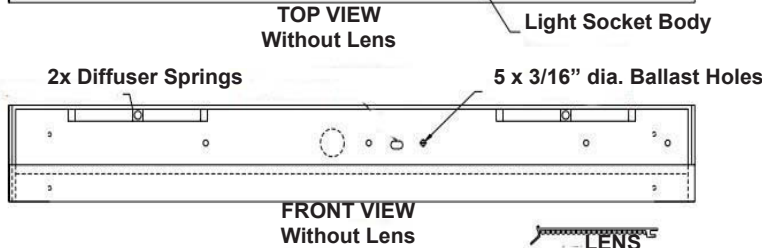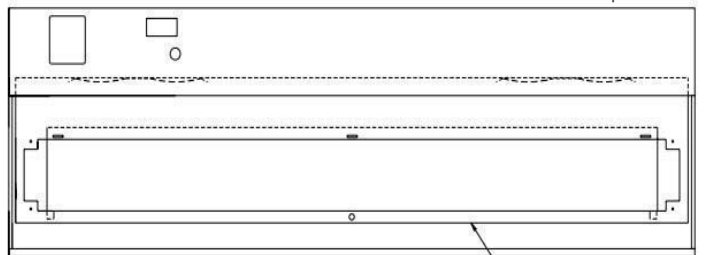

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE