

APPLICATIONS

Specification grade, mini body strip for size critical applications such as display cabinets, coves and other areas where space is at a premium.

FEATURES & BENEFITS

- ◆ Wiring knockouts provided on back, side and end of housing
- ◆ High reflectance baked white enamel finish
- ◆ ^CETL_{US} Listed
- ◆ L70 ≥ 60,000hrs
- ◆ Min 80CRI



SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side and end of housing.

ORDERING DATA

EXAMPLE: 41 48LED24DMV40

Series	Size	Gear	Wattage / Lumens	Driver Type*	Color Temp	Options
41	48 48 inches 96 96 inches	LED	48" 24 24 Watts 2800 Lumens 28 28 Watts 3200 Lumens H35 35 Watts 4800 Lumens 96" 32 32 Watts 3800 Lumens 48 48 Watts 5600 Lumens 57 57 Watts 6400 Lumens H67 67 Watts 7500 Lumens	DMV Dimming Multivolt 120-277VAC 0-10V SDMV Step Dimming Multivolt 120-277VAC 100%-40%	30 3000K 35 3500K 40 4000K 50 5000K	WP 6' Whip 3 Wire Consult factory for other options *See chart below for whip & cord ordering options

*Consult factory for Triac dimming


***Cord & Whip Ordering Chart (Add to End of Fixture Part Number)**

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps


Dimensions and specifications subject to change without notice.



DIMENSIONS

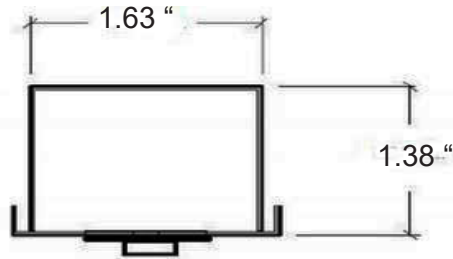

Optional Reflectors

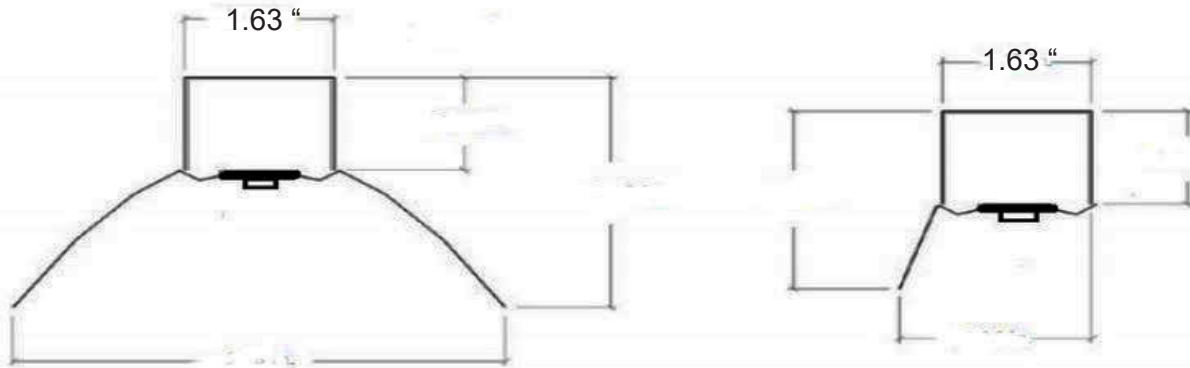

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE