

### APPLICATIONS

Premium grade sidecut LED strip fixture using high efficiency T5 Technology. Available in a compact one or two light configurations especially suited for areas with minimal space requirements such as cove lighting, store fixture, signage, under cabinets, closets, display cases, vending machines and confined areas requiring illumination and ease of installation

### FEATURES & BENEFITS

- ◆ Standard finish is white
- ◆ Available with one or two LED configurations
- ◆ Available in lengths from 12 to 48 inches - (1', 1.25', 2', 3', 4' lengths)
- ◆ Continuous row mounting capability
- ◆ Shallow design
- ◆ Every fixture is individually tested
- ◆ *cETL<sub>us</sub>* listed for damp location



### SPECIFICATIONS

Housing is die and brake formed from cold rolled steel. One piece folded construction. Finish is high reflectance baked white enamel. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears *cETL<sub>us</sub>* label.

### ORDERING DATA

**EXAMPLE: 41SC18-LED12DMV**

| 41SC        |               | LED        |                |              |                                      |            |       |
|-------------|---------------|------------|----------------|--------------|--------------------------------------|------------|-------|
| Series      | Length        | Gear       | Wattage        | Driver       |                                      | Color Temp |       |
| <b>41SC</b> | <b>18</b> 18" | <b>LED</b> | <b>12</b> 12W  | <b>DMV</b>   | 120-277V Multivolt<br>0-10V Dimmable | <b>30</b>  | 3000K |
|             | <b>24</b> 24" |            | <b>24</b> 24W  | <b>MV</b>    | Multivolt 120-277VAC                 | <b>35</b>  | 3500K |
|             | <b>36</b> 36" |            | <b>36</b> 36W  | <b>SDMV</b>  | Step dimming<br>Multivolt            | <b>40</b>  | 4000K |
|             | <b>48</b> 48" |            | <b>H67</b> 67W | <b>DHV</b>   | 347-480VAC<br>0-10V Dimming          | <b>50</b>  | 5000K |
|             | <b>72</b> 72" |            |                | <b>D347V</b> | 347VAC<br>0-10V Dimming              |            |       |
|             | <b>96</b> 96" |            |                | <b>TDMV</b>  | Triac Dimming<br>120-277VAC          |            |       |
|             |               |            |                | <b>D120</b>  | Triac Dimming<br>120VAC              |            |       |
|             |               |            |                | <b>D277</b>  | Triac Dimming<br>277VAC              |            |       |

#### Cord & Whip Ordering Chart (Add to End of Fixture Part Number)


| Part No.            | # of Wires            | Length                | End Fitting               | Finish            | Voltage                 | Amps (TL Only)      |
|---------------------|-----------------------|-----------------------|---------------------------|-------------------|-------------------------|---------------------|
| <b>WP</b> - Whip    | <b>(Blank)</b> 3 Wire | <b>(Blank)</b> 6 feet | <b>(Blank)</b> No Plug    | <b>BK</b> - Black | <b>(Blank)</b> 120-277V | <b>15</b> - 15 Amps |
| <b>CS</b> - Cordset | <b>4</b> - 4 Wire     | <b>8</b> - 8 feet     | <b>P*</b> - Standard Plug | <b>WH</b> - White | <b>120</b> - 120V       | <b>20</b> - 20 Amps |
|                     | <b>5</b> - 5 Wire     | <b>10</b> - 10 feet   | <b>TL*</b> - Twist Lock   |                   | <b>277</b> - 277V       |                     |
|                     | <b>6</b> - 6 Wire     | <b>12</b> - 12 feet   |                           |                   | <b>347</b> - 347V       |                     |
|                     |                       | <b>15</b> - 15 feet   |                           |                   | <b>480</b> - 480V       |                     |

Dimensions and specifications subject to change without notice.



|          |      |
|----------|------|
| CAT#     |      |
| JOB NAME | TYPE |


**DIMENSIONS**

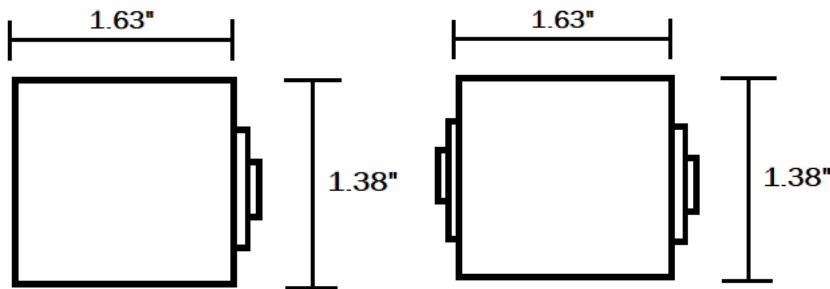

**1 Light**

**2 Light**

| Nominal Length | Actual Length A (in.) |
|----------------|-----------------------|
| 1'             | 11 31/32"             |
| 1.25'          | 14 31/32"             |
| 2'             | 22 7/18"              |
| 3'             | 34 9/32"              |
| 4'             | 46 1/16"              |

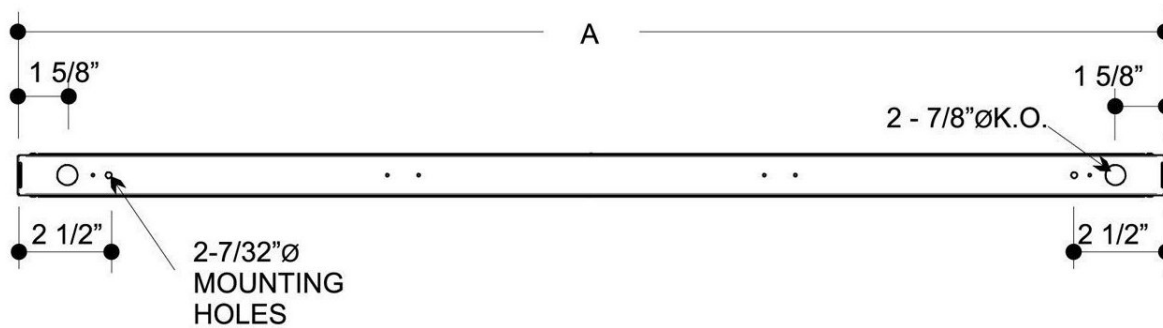

Dimensions and specifications subject to change without notice.

