

APPLICATIONS

Premium grade sidecut fluorescent strip fixture using high efficiency T5 Technology. Available in a compact one or two light configurations especially suited for areas with minimal space requirements such as cove lighting, store fixture, signage, under cabinets, closets, display cases, vending machines and confined areas requiring illumination and ease of installation

FEATURES & BENEFITS

- ◆ Standard finish is white
- ◆ Optional white reflectors available
- ◆ Advanced high efficiency T5 technology - (14W and higher)
- ◆ Available with one or two lamp configurations
- ◆ Available in lengths from 12 to 48 inches - (1', 1.25', 2', 3', 4' lengths)
- ◆ Continuous row mounting capability
- ◆ Pre-lamp available
- ◆ Shallow design
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing is die and brake formed from cold rolled steel. One piece folded construction. Finish is high reflectance baked white enamel. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: 41SC-121MV

Series	# of Lamps	Lamp Size	Housing Type	Ballast Type	Options	
41SC	1 1 Lamp	*06 T5 9"	Blank Standard	MV Multi-volt 120-277V	CP3 Cord & Plug	
	2 2 Lamp	*08 T5 12"				DMV Dimming Multi-volt
		14 T5 22"		LED** Wired 1 end hot for T8 LED Tubes	L1 Lamp included (T5-4100K cool white)	
		21 T5 34"				LED-2E** Wired 2 ends hot for T8 LED Tubes
		28 T5 46"				
		24 T5HO 22"				
		39 T5HO 34"				
		54 T5HO 46"				

*1 lamp only

** Assembled with no ballast, Made for UL Listed self ballasted retrofit LED lamps

***See chart below for whip & cord ordering options
Call for additional options

***Cord & Whip Ordering Chart (Add to End of Fixture Part Number)


Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Dimensions and specifications subject to change without notice.




DIMENSIONS


Lamp Count 1

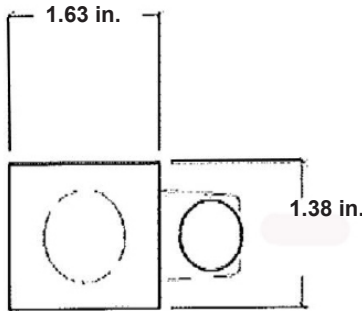

Lamp Count 2

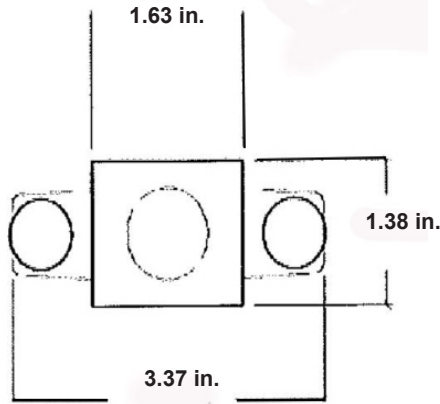

Nominal Length	Actual Length A (in.)
1'	11 31/32"
1.25'	14 31/32"
2'	22 7/18"
3'	34 9/32"
4'	46 1/16"

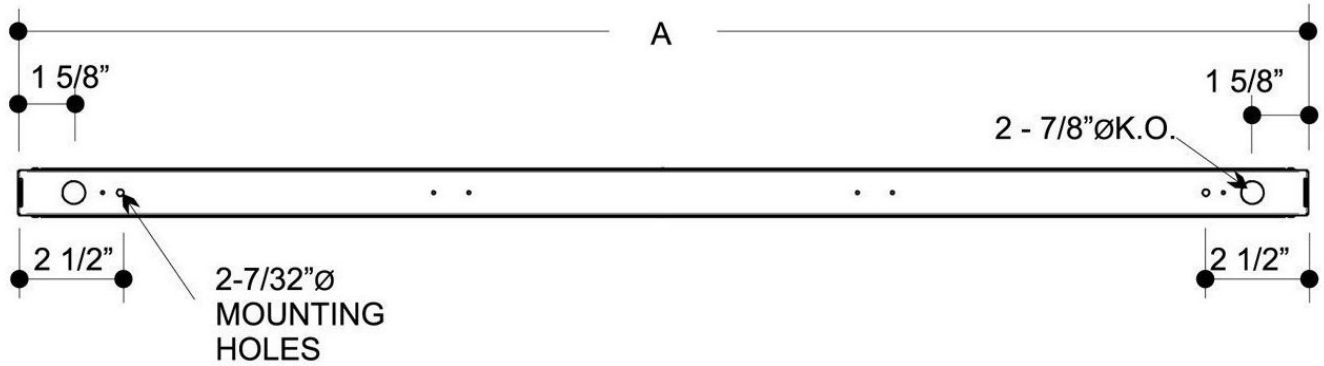

Dimensions and specifications subject to change without notice.

