

APPLICATIONS

Premium grade sidecut fluorescent strip fixture using high efficiency T5 Technology. Available in a compact one or two light configurations especially suited for areas with minimal space requirements such as cove lighting, store fixture, signage, under cabinets, closets, display cases, vending machines and confined areas requiring illumination and ease of installation

FEATURES & BENEFITS

- ◆ Standard finish is white
- ◆ Optional white reflectors available
- ◆ Advanced high efficiency T5 technology - (14W and higher)
- ◆ Available with one or two lamp configurations
- ◆ Available in lengths from 12 to 48 inches - (1', 1.25', 2', 3', 4' lengths)
- ◆ Continuous row mounting capability
- ◆ Pre-lamp available
- ◆ Shallow design
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing is die and brake formed from cold rolled steel. One piece folded construction. Finish is high reflectance baked white enamel. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears **UL** label.

ORDERING DATA


EXAMPLE: 41SC-121MV

41SC		Lamp Size		Housing Type		Ballast Type		Options*	
Series	# of Lamps								
41SC	1 1 Lamp 2 2 Lamp	*06 T5 9"		Blank	Standard	MV	Multi-volt 120-277V	CP3	Cord & Plug
		*08 T5 12"				DMV	Dimming Multi-volt	F	Fused
		14 T5 22"				LED**	Wired 1 end hot for T8 LED Tubes	L1	Lamp included (T5-4100K cool white)
		21 T5 34"				LED-2E**	Wired 2 ends hot for T8 LED Tubes	RIF	Radio interference filter
		24 T5HO 22"							*Call for additional options
		39 T5HO 34"							
		54 T5HO 46"							



*1 lamp only

** Assembled with no ballast, Made for UL Listed self ballasted retrofit LED lamps

Lamp Count 1

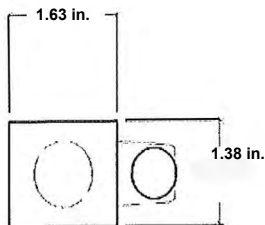

Lamp Count 2

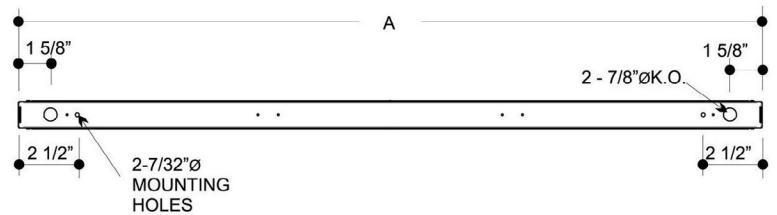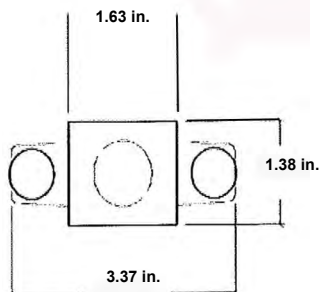

Nominal Length	Actual Length A (in.)
1'	11 31/32"
1.25'	14 31/32"
2'	22 7/18"
3'	34 9/32"
4'	46 1/16"

Dimensions and specifications subject to change without notice.