

APPLICATIONS

Professional grade LED narrow channel fixture. For use in indoor applications such as factories, warehouses, workshops, utility areas, coves and public buildings where industrial grade is required.

FEATURES & BENEFITS

- ◆ Snap-on components for easy assembly and maintenance
- ◆ Versatile end plate doubles as coupler for continuous row mounting
- ◆ Available in 24", 48", and 96" (2', 4', & 8' lengths)
- ◆ Surface, stem or chain mountable
- ◆ Narrow body width 2 3/4" nominal
- ◆ ^CETL_{US} Listed for damp locations
- ◆ Made with US Steel
- ◆ BAA/ARRA Compliant



SPECIFICATIONS

Housing is die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Single wireway cover on non-tandem units. Knockouts are provided for stem mounting. Mounting holes are provided.


ORDERING DATA

EXAMPLE: 42-48PLED37DMV40

| Series | | Length | | Suffix | Gear | Wattage/ Lumens | | Lens | | Color Temp | | Options | | | |
|--------|----|--------|--|-----------------------------|------|-----------------|----------|--------------|---------------|------------|--|---------|------------------------------|---|-----|
| 42 | 24 | 24" | | P Professional Series | LED | 2ft. | | Blank | No Lens | | 30 | 3000K | EM | 10W Emergency | |
| | 48 | 48" | | | | 22 | 22 Watts | | 2800 Lumens | FR | Frosted Lens | | 35 | 3500K | EM7 |
| | 96 | 96" | | | | 37 | 37 Watts | 5035 Lumens | 40 | | 4000K | EM5 | 5W Emergency battery pack | | |
| | | | | | | 4ft. | | | | 50 | 5000K | | ~900 Lumens | | |
| | | | | | | 8ft. | | | | | | | ~650 Lumens | | |
| | | | | | | 37 | 37 Watts | 5035 Lumens | Driver | | | | LR | Lens ready (Lens must be ordered on separate line) | |
| | | | | | | 74 | 74 Watts | 10070 Lumens | DMV | | Factory Installed Dimmable 120-277VAC Multivolt 0-10V | | WP | 6' 3 wire whip | |

DIMENSIONS

LINE ART

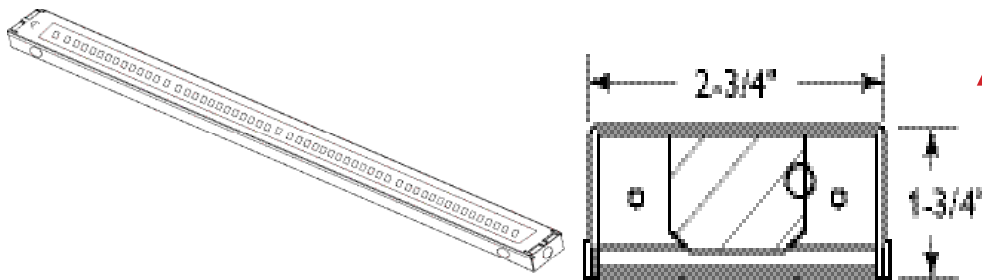

Accessories

- A69 Wireguard per 4 ft.
- L1084 4 ft. lens
- M38-LED (ends to add lens; need 2 per fixture)



*Dimming includes leads (extended leads)

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

Wattage & Lumens

| | | Delivered Lumens | | | | | | | |
|-------------|---------------|------------------|---------|---------|---------|---------|---------|---------|---------|
| Part Number | Input Wattage | 3000K | | 3500K | | 4000K | | 5000K | |
| | | No Lens | FR Lens | No Lens | FR Lens | No Lens | FR Lens | No Lens | FR Lens |
| 42-24PLED22 | 22 | 2618 | 2415 | 2708 | 2497 | 2800 | 2583 | 2848 | 2628 |
| 42-48PLED22 | 22 | 2618 | 2415 | 2708 | 2497 | 2800 | 2583 | 2848 | 2628 |
| 42-48PLED37 | 37 | 4709 | 4380 | 4870 | 4529 | 5037 | 4685 | 5124 | 4766 |
| 42-96PLED37 | 37 | 4709 | 4380 | 4870 | 4529 | 5037 | 4685 | 5124 | 4766 |
| 42-96PLED74 | 74 | 9418 | 8759 | 9740 | 9059 | 10074 | 9369 | 10249 | 9532 |

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE