

### APPLICATIONS

A shallow economy designed 7" wraparound LED luminaire available in either two or four foot lengths that is maintenance free and has a low initial cost. This series also delivers excellent brightness control and is suitable for individual or continuous run installations.

### FEATURES & BENEFITS

- ◆ Low initial cost, maintenance free, excellent brightness control
- ◆ Design embossed ends are locked and secures to the housing
- ◆ Suitable for individual or continuous run installations
- ◆ Min CRI 82
- ◆ <sub>c</sub>ETL<sub>us</sub> Listed for damp locations

### SPECIFICATIONS

Completely die formed from heavy gauge cold rolled steel. A crystal clear diffuser extruded from 100% virgin acrylic that will maintain it's color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards. The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glare-free, diffused light.



### ORDERING DATA

**EXAMPLE: 769-24LED28DMV40**


| 769              |                   | LED          |          |            |                                   |             |  |                 |  |
|------------------|-------------------|--------------|----------|------------|-----------------------------------|-------------|--|-----------------|--|
| Series           | Size              | Width        |          | Gear       | Wattage                           | Driver Type |  | Color Temp      | Options                                  |
| <b>769</b>       | <b>24</b> 24 inch | <b>Blank</b> | Standard | <b>LED</b> | <b>24"</b>                        | <b>DMV</b>  | Dimmable                                 | <b>30</b> 3000K | <b>WP</b> 6' Whip 3 Wire                 |
| LED Premium Wrap | <b>48</b> 48 inch | <b>W</b>     | Wide     |            | <b>24" wide</b>                   |             | Multivolt                                | <b>35</b> 3500K | <b>EM</b> 10W, 1200 Lumen battery backup |
|                  |                   |              |          |            | <b>32</b> 32 Watts 3760 lumens    |             | 120-277VAC                               | <b>40</b> 4000K | <b>EM7</b> 7W, 840 Lumen battery backup  |
|                  |                   |              |          |            | <b>48</b> 48 Watts 5700 lumens    |             | 0-10V                                    | <b>50</b> 5000K | <b>EM5</b> 5W, 600 Lumen battery backup  |
|                  |                   |              |          |            | <b>57</b> 57 Watts 6500 lumens    |             | Consult factory for Step Dimming Options |                 |  |
|                  |                   |              |          |            | <b>48"</b>                        |             |  |                 |  |
|                  |                   |              |          |            | <b>23</b> 23 Watts 2930 lumens    |             |  |                 |  |
|                  |                   |              |          |            | <b>35</b> 35 Watts 4370 lumens    |             |  |                 |  |
|                  |                   |              |          |            | <b>48</b> 48 Watts 5750 lumens    |             |  |                 |  |
|                  |                   |              |          |            | <b>56</b> 56 Watts 6570 lumens    |             |  |                 |  |
|                  |                   |              |          |            | <b>48"wide</b>                    |             |  |                 |  |
|                  |                   |              |          |            | <b>65</b> 65 Watts 8100 lumens    |             |  |                 |  |
|                  |                   |              |          |            | <b>97</b> 97 Watts 11500 lumens   |             |  |                 |  |
|                  |                   |              |          |            | <b>114</b> 114 Watts 13140 lumens |             |  |                 |  |

\*See chart below for whip & cord ordering options

\*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

| Part No.            | # of Wires            | Length                | End Fitting               | Finish            | Voltage                 | Amps (TL Only)      |
|---------------------|-----------------------|-----------------------|---------------------------|-------------------|-------------------------|---------------------|
| <b>WP</b> - Whip    | <b>(Blank)</b> 3 Wire | <b>(Blank)</b> 6 feet | <b>(Blank)</b> No Plug    | <b>BK</b> - Black | <b>(Blank)</b> 120-277V | <b>15</b> - 15 Amps |
| <b>CS</b> - Cordset | <b>4</b> - 4 Wire     | <b>8</b> - 8 feet     | <b>P*</b> - Standard Plug | <b>WH</b> - White | <b>120</b> - 120V       | <b>20</b> - 20 Amps |
|                     | <b>5</b> - 5 Wire     | <b>10</b> - 10 feet   | <b>TL*</b> - Twist Lock   |                   | <b>277</b> - 277V       |                     |
|                     | <b>6</b> - 6 Wire     | <b>12</b> - 12 feet   |                           |                   | <b>347</b> - 347V       |                     |
|                     |                       | <b>15</b> - 15 feet   |                           |                   | <b>480</b> - 480V       |                     |

### DIMENSIONS

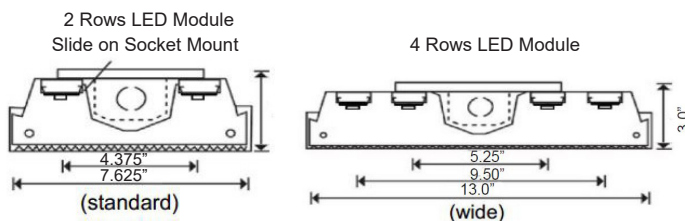

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

|          |  |
|----------|--|
| CAT#     |  |
| JOB NAME |  |
| TYPE     |  |