

771 SERIES

9" Rounded Premium Wraparound



Economically designed premium round wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public buildings where low glare and ease of installation is required.

- Nominal 9" width
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides, or smooth frosted lens
- Available in 48 inch or 96 inch lengths
- Rounded lens for unique appearance
- Single or continuous row mounting capability
- Surface or pendant mountable
- _CUL_{US} listed for damp location

CONSTRUCTION

Fixture housing, lampholder brackets and sections, and reflector are constructed of code-gauge die-formed steel. All devices are UL/CUL listed, and suitable for damp locations. Ballasts and lampholders are replaceable without removing the fixture from the ceiling. All metal parts are painted after fabrication with post powder paint.

SIZE W x L x H in inches

9^{9/16}"W x 48"L x 3^{3/16}"Dp

9^{9/16}"W x 96"L x 3^{3/16}"Dp

The most economical, practical, and user friendly series of LED fixtures with energy savings, quality of light, long life and hassle-free maintenance/ EZLED fixtures are UL listed with the latest LED T8 bypass lamps. These fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required). They also provide the flexibility to change the wattage and color temperature at any time. Are you concerned about maintenance with an LED array and driver fixture? EZLED resolves that issue by utilizing a self-contained LED lamp that fits into your fixture just like the classic fluorescent tube. The fixture performance will evolve over time with the evolution of the T8 LED lamp technology, and our five-year warranty guarantees a reliable, high quality product.

Lamp Specifications

Our EZLED fixtures come standard with SaveGreen T8 LED lamps. They are available in 2 or 4 foot sizes in different wattage, lumens, and color temperature options (see lamp options and specifications at www.savegreenlighting.com).

- L70 > 50000 hrs.
- Operating temperature: -20°C to 50°C
- Color Temperature: 3500K, 4000K, 5000K
- G13 pins (same as fluorescent linear T8 bipin)
- AC100-277V
- Integral driver (non-isolated) eliminates the need for external driver or ballast
- Environmentally friendly, no mercury used
- UL Classified
- Min CRI 80
- 5 year warranty

Optional Dimming

The 4 foot lamps are available with a dimming option. Specially designed dimming lamps require an external driver that runs 1 or 2 lamps (more than 2 lamps require multiple external drivers).

Emergency Options

The standard EZLED lamps require an inverter or an all-in-one emergency kit that includes LED array, battery, and driver. Dimmable T8 LED with external driver works with standard LED EM in it.

ORDERING DATA

EXAMPLE: 771-232LEDL15W840FR

771

Series	Gear	Lens	Lamp Wattage	Lamp Brand	Options
771 Wraparound	LED	FR Frosted RL Ribbed Linear	4 ft. L12W 12.5 Watts 1750 Lumens Keystone L15W 15 Watts 1850 Lumens Lunera L15W 15 Watts 1740 Lumens L18W 18 Watts 2500 Lumens*	Blank House Brand Lamp (Savegreen) LUN Lunera Brand KEY Keystone Brand JAM James Brand**	EM Emergency Battery Backup 500 Lumens See pg. 2 for whip and cord ordering chart
# Lamps 1 1 Lamp 2 2 Lamps 3 3 Lamps			8 ft. L12W 12.5 Watts 1750 Lumens Keystone L15W 15 Watts 1850 Lumens Lunera L15W 15 Watts 1740 Lumens L18W 18 Watts 2500 Lumens*	**Special Order	
Lamp Type 28 46" T5 28TAN 2-46" TAN T5 32 48" T8 32TAN 2-48" TAN T8 54 46" T5HO 54TAN 2-46" TAN T5HO			*Premium lamp option	Color Temp 830 3000K 835 3500K 840 4000K 850 5000K	



Dimensions and specifications subject to change without notice.


800-444-WATT | www.mobern.com
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	


*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

DIMENSIONS


End View

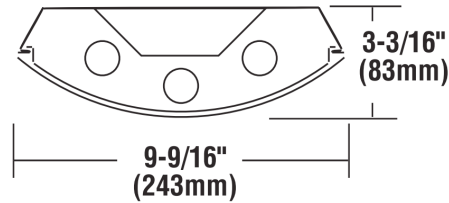

48 Inch

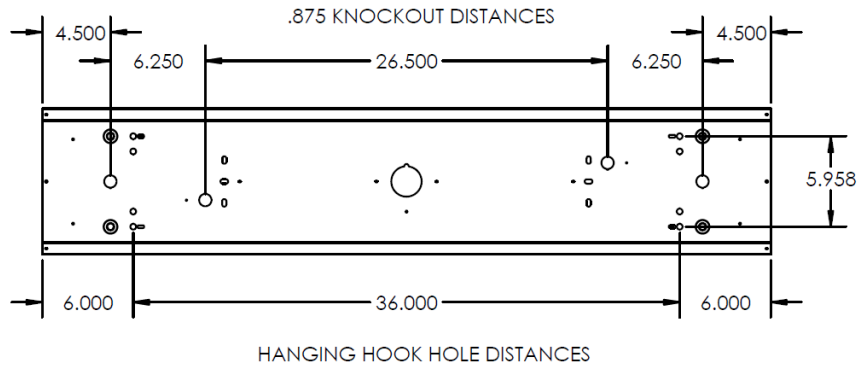

96 Inch

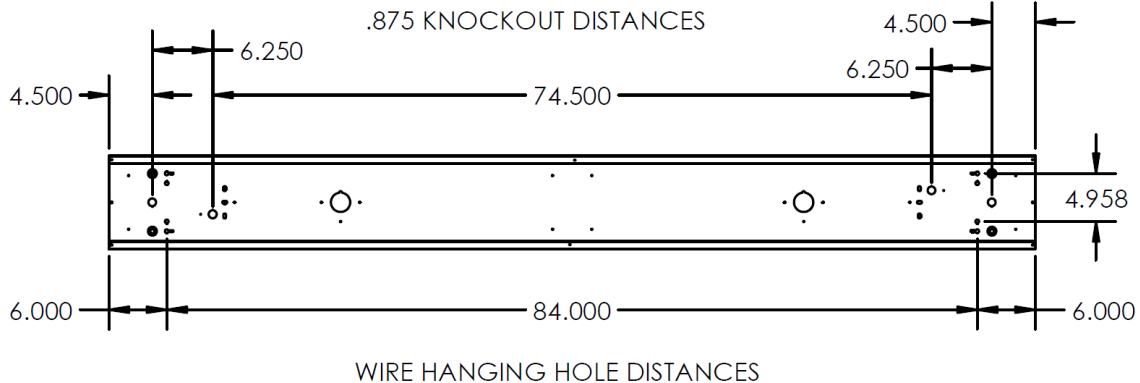

Dimensions and specifications subject to change without notice.

800-444-WATT ♦ www.mobern.com ♦
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE