

APPLICATIONS

This heavy duty constructed LED premium round wraparound is ideal for individual or continuous runs with solid ends. It has a low initial cost, and is available in a 48" and 96" lengths. The housing is completely die formed from heavy gauge cold rolled steel, and design embossed ends are locked and secured to the housing. The wireway cover snaps on or off with or without tools for easy assembly.



FEATURES & BENEFITS

- ◆ Surface or pendant mounted
- ◆ Completely die formed from heavy gauge cold rolled steel
- ◆ Lens has clear acrylic prismatic bottom with ribbed linear sides
- ◆ Single or continuous row mounting capability
- ◆ cETL_{US} listed
- ◆ 5 year warranty

ORDERING DATA

EXAMPLE: 771-48LED48DMVRL40

771

Series	Size	Gear	Wattage/Lumens	Driver	Lens	Color Temp	
771 LED 9" Rounded Premium Wrap	48 48 inch	LED	48 inch		FR Frosted	30 3000K	
	96 96 inch		32 32 Watts 3450 Lumens	35 3500K			
			48 48 Watts 4800 Lumens	SDMV Step Dimming 120-277VAC 100%-40%	40 4000K		
			72 72 Watts 7200 Lumens		50 5000K		
			96 inch		D347V 347VAC 0-10V Dimming		
			48 48 Watts 4800 Lumens	D120 Triac Dimming 120VAC			
			65 65 Watts 7000 Lumens			D277 Triac Dimming 277VAC	
			97 97 Watts 9600 Lumens				

Options

- WP** 6' whip, 3 wire
- EM** 10W, 1200 Lumens Battery backup
- EM5** 5W, 600 Lumens Battery backup
- EM7** 7W, 840 Lumens Battery backup

Plug In Options

- PI1** 3 wire harness, including white, black, and green
- PI2** 4 wire harness, including white, black, green and blue for emergency battery backup
- PI3D** 5 wire harness, including white, black, green, violet, and gray

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	



Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

DIMENSIONS

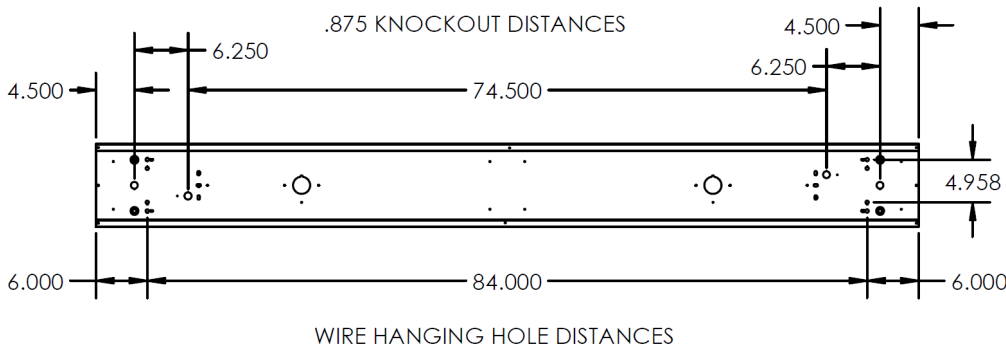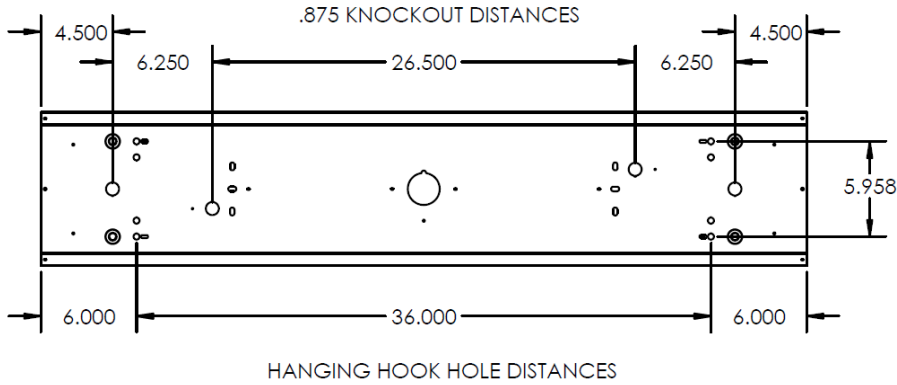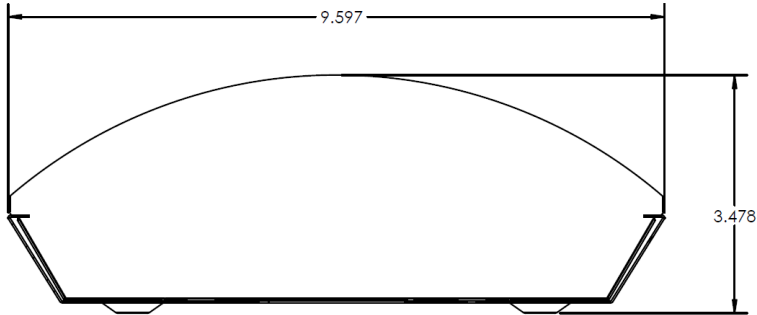

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE