

### APPLICATIONS

This heavy duty constructed LED premium round wraparound is ideal for individual or continuous runs with solid ends. It has a low initial cost, and is available in a 48" and 96" lengths. The housing is completely die formed from heavy gauge cold rolled steel, and design embossed ends are locked and secured to the housing. The wireway cover snaps on or off with or without tools for easy assembly.

### FEATURES & BENEFITS

- ◆ Surface or pendant mounted
- ◆ Completely die formed from heavy gauge cold rolled steel
- ◆ Lens has clear acrylic prismatic bottom with ribbed linear sides
- ◆ Single or continuous row mounting capability
- ◆ cETL<sub>US</sub> listed
- ◆ 5 year warranty



### ORDERING DATA

EXAMPLE: 771-48PLED37DMVFR30

| Series                                     | Length           | Suffix              | Gear | Wattage / Lumens   | Driver                            | Color Temp                                   | Lens                           |
|--|------------------|---------------------|------|--|-----------------------------------|--|--------------------------------|
| 771<br>LED Round-<br>Premium<br>Wraparound | 48 48"<br>96 96" | p<br>(Professional) | LED  | 4 ft.<br>37 37 Watts 4520 Lumens<br>8 ft.<br>74 74 Watts 9060 Lumens | DMV 120-277 VAC<br>0-10V Dimmable | 30 3000K<br>35 3500K<br>40 4000K<br>50 5000K | FR Frosted<br>RL Ribbed Linear |

### Options

- WP 6' whip, 3 wire
- EM 10W, 1200 Lumens Battery backup
- EM5 5W, 600 Lumens Battery backup
- EM7 7W, 840 Lumens Battery backup

### Plug In Options

- P11 3 wire harness, including white, black, and green
- P12 4 wire harness, including white, black, green and blue for emergency battery backup
- P13D 5 wire harness, including white, black, green, violet, and gray

\*See chart below for whip & cord ordering options

\*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

| Part No.                  | # of Wires   | Length   | End Fitting   | Finish                   | Voltage  | Amps (TL Only)               |
|---------------------------|--|--|---|--------------------------|--|------------------------------|
| WP - Whip<br>CS - Cordset | (Blank) 3 Wire<br>4 - 4 Wire<br>5 - 5 Wire<br>6 - 6 Wire | (Blank) 6 feet<br>8 - 8 feet<br>10 - 10 feet<br>12 - 12 feet<br>15 - 15 feet | (Blank) No Plug<br>P* - Standard Plug<br>TL* - Twist Lock | BK - Black<br>WH - White | (Blank) 120-277V<br>120 - 120V<br>277 - 277V<br>347 - 347V<br>480 - 480V | 15 - 15 Amps<br>20 - 20 Amps |



Values based on ambient temp of 25°C and 4000K  
Lumens are subject to a tolerance of ± 10%  
Wattage is approximate and subject to a tolerance of ± 5%  
Dimensions and specifications subject to change without notice.





◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#


JOB NAME

TYPE

**DIMENSIONS**

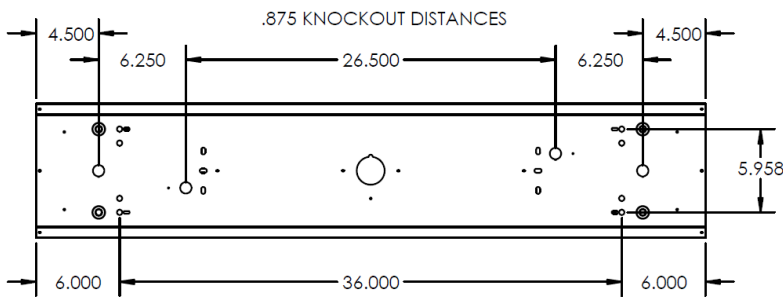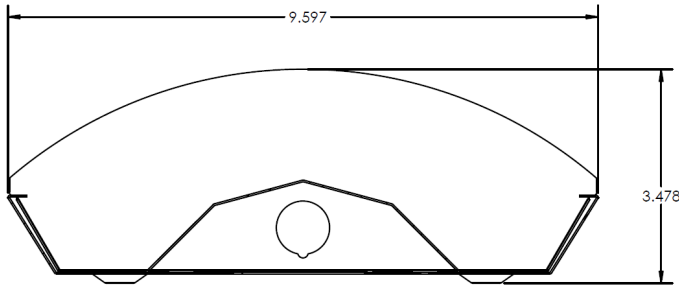

HANGING HOOK HOLE DISTANCES

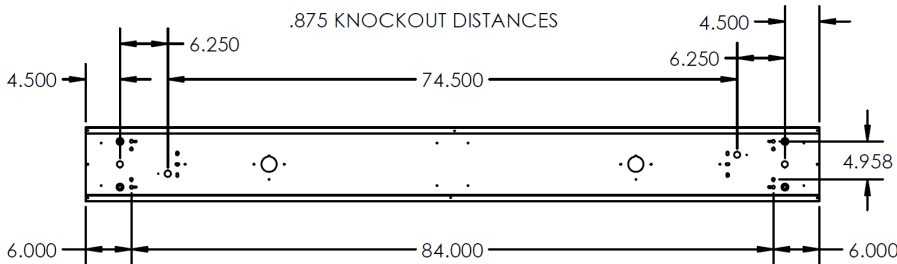

WIRE HANGING HOLE DISTANCES

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE