

APPLICATIONS

A clear acrylic #8 pattern lens and 1 or 2 rows of LEDs in a cross-section allows this wraparound to be suitable for a variety of applications. A full wireway allows for more uniform light distribution. A great choice for corridors, hallways and other institutional spaces.

FEATURES & BENEFITS

- ◆ A full wireway allows for more uniform light distribution, 1 or 2 LEDs in cross section
- ◆ Acrylic #8 pattern lens
- ◆ Suitable for a variety of applications
- ◆ Min CRI 80
- ◆ cETL_{US} Listed for damp locations



SPECIFICATIONS

Housing is 22 gauge baked white enamel cold rolled steel body and ends. Wiring knockouts are provided on back end of housing. Ballast cover or reflector snaps into place. No tools are required for ballast access. Lens is held with lift and shift method.

ORDERING DATA

EXAMPLE: 772N-48LED28DMV40

772N		LED		DMV		Kelvin Temperature		Options	
Series	Size	Gear	Wattages/Lumens		Driver Type				
772N 5" Narrow Wraparound	48 48 inch 96 96 inch	LED			DMV Dimmable 120-277VAC Multivolt 0-10V SDMV Stepdimming 120-277VAC 100-40%	30 3000K 35 3500K 40 4000K 50 5000K			EM 10W, 1200 Lumen Battery backup EM7 7W 840 Lumen Battery backup EM5 5W 600 Lumen Battery backup WP 6' Whip 3 Wire
			4 ft.						
			23 23 Watts 2650 Lumens						
			28 28 Watts 2950 Lumens						
			32 32 Watts 3450 Lumens						
			35 35 Watts 3800 Lumens						
			48 48 Watts 4800 Lumens						
			72 72 Watts 7200 Lumens						
			8 ft.						
			23 23 Watts 2650 Lumens						
			35 35 Watts 3800 Lumens						
			48 48 Watts 5100 Lumens						
			56 56 Watts 6000 Lumens						
			65 65 Watts 7000 Lumens						
			97 97 Watts 9600 Lumens						

Consult factory for other options
*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	



DIMENSIONS



2 Rows of LEDs Distribution



1 Row of LEDs Distribution

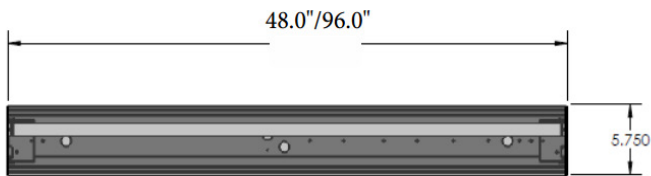

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	