


APPLICATIONS

Premium grade surface mounted wraparound luminaire with low brightness linear sides. For use in indoor applications where high efficiency, high performance and ease of installation is required. Ideal for retail stores, stairwells, utility areas, schools and public buildings.

FEATURES & BENEFITS

- ◆ P3 technology - Post Powder Paint > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ 90 degree sides for easy side wiring
- ◆ Nominal 7 3/4" wraps
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Single or continuous row mounting capability
- ◆ Every fixture individually tested.
- ◆ Min CRI 82

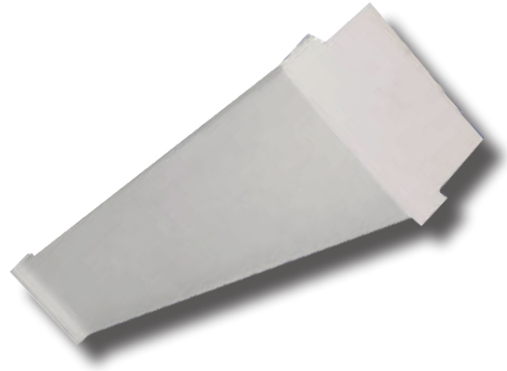

SIZE: W x L x H in inches
 7.75W x 48.0L x 4.5"H
 7.75W x 96.0L x 4.5"H

MOUNTING: Surface or suspended

SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance P3 - Post Powder Paint. Diffuser hinges from either side in lift and shift manner and is self-centering.

ORDERING DATA

EXAMPLE: 779-48LED32DMV40

779		LED							
Series	Size	Gear	Wattage / Lumens		Driver		Color Temp		Options
779	48 48 inches	LED	4 ft.		DMV	Dimmable	30	3000K	WP 6' Whip, 3 Wire
Premium 90°	96 96 inches		32	32 Watts 3616 lumens		Multivolt	35	3500K	EM 10W, 1200 Lumen battery backup
Wraparound			48	48 Watts 5424 lumens		120-277VAC	40	4000K	EM5 5W, 600 Lumen battery backup
			57	57 Watts 6441 lumens		0-10V	50	5000K	EM7 7W, 840 Lumen battery backup
			97	97 Watts 10961 lumens	SDMV	Step Dimming			
			8 ft.			120-277VAC			
			48	38 Watts, 5424 lumens		Multivolt			
			65	65 Watts, 7345 lumens		100%-40%			
			97	97 Watts, 10961 lumens					

Consult for triac dimming

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	


Dimensions and specifications subject to change without notice.




CAT#	
JOB NAME	
TYPE	

DIMENSIONS

FIXTURE CROSS SECTION VIEW

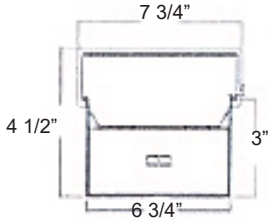

FIXTURE BACK PLAN VIEW

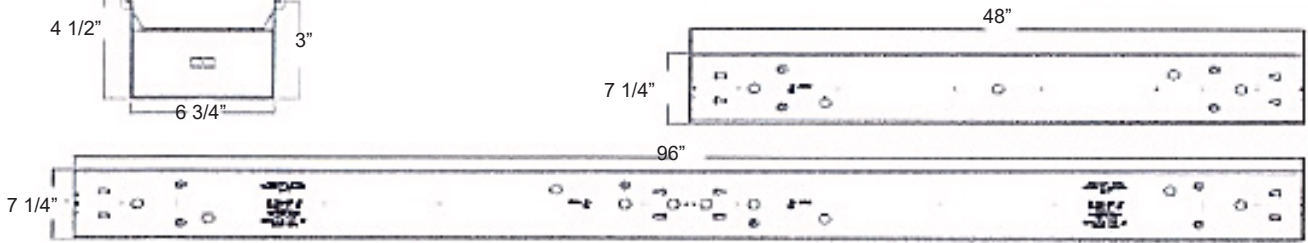

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE