

APPLICATIONS

Premium grade surface mounted wraparound luminaire with low brightness linear sides. For use in indoor applications where high efficiency, high performance and ease of installation is required. Ideal for retail stores, stairwells, utility areas, schools and public buildings.

FEATURES & BENEFITS

- ◆ P3 technology - Post Powder Paint
- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ 90 degree sides for easy side wiring
- ◆ Nominal 7 3/4" wraps
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Available in lengths of 48 and 96 inches - (4' and 8' lengths)
- ◆ Surface or chain mounted
- ◆ Single or continuous row mounting capability
- ◆ Every fixture individually tested.

SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance P3 - Post Powder Paint. Diffuser hinges from either side in lift and shift manner and is self-centering.



SIZE: W x L x H in inches
 7.75W x 48.0L x 4.5"H
 7.75W x 96.0L x 4.5"H

MOUNTING: Surface or suspended



ORDERING DATA

EXAMPLE: 779 48 LED 32 DMV 40

779		LED									
Series	Size	Gear	Wattage		Driver		Kelvin Temperature		Options		
779 Premium 90° Wraparound	48 4 foot 96 8 foot	LED	32	32 Watts	MV	Multi Volt 120-277V	30	3000K	Consult factory for options		
			48	48 Watts			35	3500K			
			57	57 Watts	DMV	0-10V	40	4000K			
			65	65 Watts			50	5000K			
			72	72 Watts							
			97	97 Watts							
			110	110 Watts							
			144	144 Watts							

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Dimensions and specifications subject to change without notice.




TECHNICAL INFORMATION


LED Gear	Size	Wattage	Initial Lumens (lm)	Kelvin Temperature	CRI
Standard	4 Foot	32	3450	3500, 4000	>80
Standard	4 Foot	48	4800	3500, 4000	>80
Standard	4 Foot	57	5400	3500, 4000	>80
High Output	4 Foot	72	7000	3000, 3500, 4000, 5000	>80
Standard	8 Foot	65	7000	3000, 3500, 4000, 5000	>80
Standard	8 Foot	97	9600	3000, 3500, 4000, 5000	>80
High Output	8 Foot	110	11200	3000, 3500, 4000, 5000	>80
High Output	8 Foot	144	14000	3000, 3500, 4000, 5000	>80

DIMENSIONS

FIXTURE CROSS SECTION VIEW



FIXTURE BACK PLAN VIEW

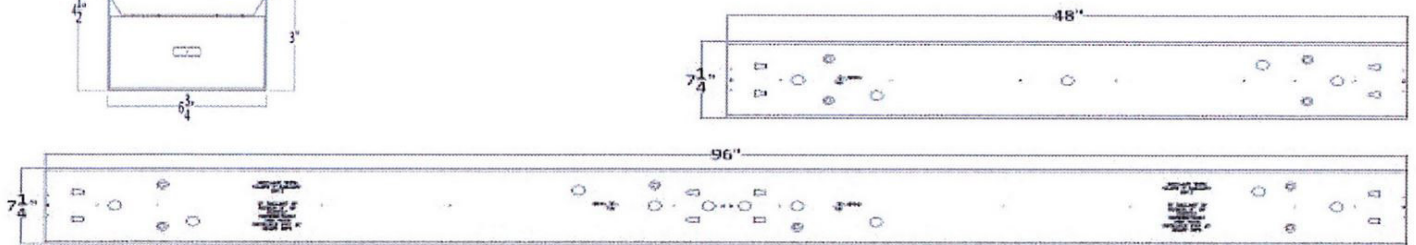

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Drive, Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE