

**FEATURES & BENEFITS**

- ◆ 120V input voltage, 50/60Hz
- ◆ High power factor
- ◆ Ambient operating temperature -40°C to +50°C
- ◆ L<sub>70</sub> > 50,000 hrs
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic, polycarbonate & polyethylene diffusers
- ◆ Fits most 3 inch diameter posts (not included)
- ◆ UL Listed for wet locations



**ORDERING DATA**

**EXAMPLE: ACRN-LED13D120BKPFTA30**


ACRN	LED	D120		Finish		Shape	Lens	Color Temp
<b>Series</b>	<b>Gear</b>	<b>Wattage &amp; Lumens</b>		<b>Driver</b>		<b>Shape</b>		<b>Color Temp</b>
<b>ACRN</b> Acorn/Flame Tip Collection	<b>LED</b>	<b>13</b> 13 Watts 1000 Lumens	<b>14</b> 14 Watts 1400 Lumens	<b>13</b> 13 Watts 1000 Lumens	<b>14</b> 14 Watts 1400 Lumens	<b>13</b> 13 Watts 1000 Lumens	<b>14</b> 14 Watts 1400 Lumens	<b>13</b> 13 Watts 1000 Lumens
		<b>23</b> 23 Watts 1900 Lumens		<b>D120</b> Dimmable 120V	<b>BK</b> Black <b>WH</b> White	<b>PFT</b> Flame Tip <b>PA</b> Acorn	<b>A</b> Clear Acrylic <b>C</b> Clear Polycarbonate <b>W</b> White Polyethylene	<b>30</b> 3000K <b>40</b> 4000K

**ORDERING DATA**

**EXAMPLE: ACRNINCLEDBKPFTA30**

Series	Socket	Lamp Type (optional)	Finish	Shape	Lens	Color Temp (Optional)	Options
<b>ACRN</b> Acorn/ Flame Tip Collection	<b>INC</b> Incandescent*  *Suitable for lamps up to 150W	<b>LED</b> 9.5 watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable 50W Max	<b>BK</b> Black <b>WH</b> White	<b>PFT</b> Flame Tip <b>PA</b> Acorn	<b>A</b> Clear Acrylic <b>C</b> Clear Polycarbonate <b>W</b> White Polyethylene	<b>30</b> 3000K <b>40</b> 4000K	<b>PC</b> Photocell <sup>1</sup>

**DIMENSIONS**

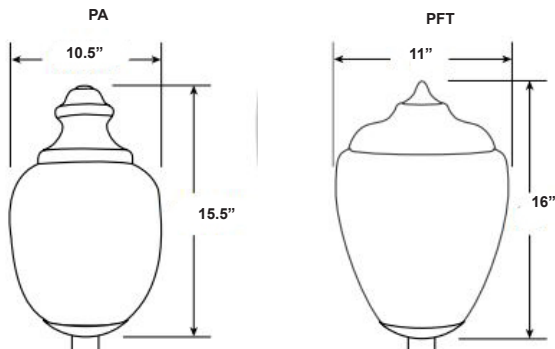

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#		
JOB NAME	TYPE	