


APPLICATIONS

Make a bold statement in your space with this dramatic geometric shaped linear line of light. This fixture is ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas and residentially over tables, kitchen islands and home offices. A unique, mechanical joiner bracket in conjunction with our special tool allows for assembling channels together with no light leak and a clean connection.

FEATURES & BENEFITS

- ◆ Easy Installation
- ◆ Innovative anti-lightleak clips in the space between diffuser and end-cap
- ◆ Aluminum channel
- ◆ Integral wire harness
- ◆ L70 life > 50,000 hours
- ◆ Operating Temperature -20°C to 55°C
- ◆ Min CRI 80
- ◆ Suitable for dry and damp locations

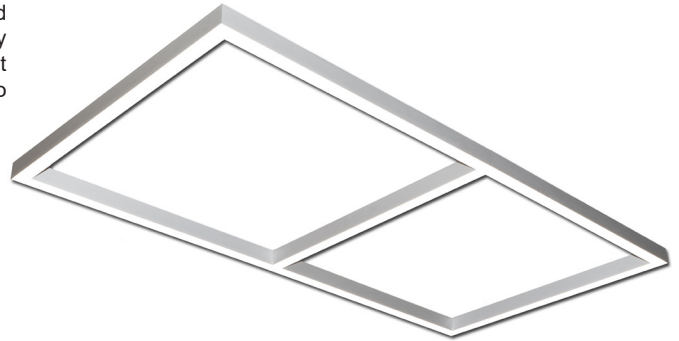

SPECIFICATIONS

Anodized Aluminum Channel is lightweight, has small dimensions and dissipates heat well; designed especially for the flexible LED tape. Highly tooled plastic end caps screw onto the aluminum channel and protect the channel and LED tape from dust, keeping the LED tape in clean and optimum condition. Snap-in flush frosted lens is specially formulated for smooth illumination of the LED tape.

ORDERING DATA

EXAMPLE: AIOCSRA4X8-LED210DMVS35

Series	Shape	Width	Size/Gear/Wattage/Driver	Finish	Color Temp
AIOC All in one Channel Rectangle	R Rectangle	A 2.16"	4X8-LED210DMV 4t X 8ft, LED, 210W 21000 Lumens, 120- 277VAC 0-10V Dimmable	SA Satin Aluminum WH White (Consult for custom finishes)	35 3500K 40 4000K
Body					
S Square					

Dimensions and specifications subject to change without notice.

CAT#	
JOB NAME	TYPE

ACCESSORIES

- AIOC5WMFH¹** Wiring Harness 5" to Join 2 Channels
- AIOCSURF¹** Surface Mount Screw and Toggle Set of 3
(Includes 24 Inch Power Cord)
- AIOCREC-SA²** Recessed Mounting Brackets Set of 2
(Includes 24 Inch Power Cord)
- A-HCPF606WH5W³** Pendant Mounting Power Feed Canopy Kit
5 Wire For Up To 6' Drop
- A-HCPF612WH5W³** Pendant Mounting Power Feed Canopy Kit
5 Wire For Up To 12' Drop
- A-HCNPF606WH** Pendant Mounting Non-Power Canopy Kit, 6'
Cable With Canopy
- A-HCNPF612WH** Pendant Mounting Non-Power Canopy Kit
12' Cable With Canopy

¹Included with channels only need to purchase for replacements
²Aluminum channel has no flange so review recessed application to ensure this will work
³Use one power feed canopy kit for every power drop. Non-power feed version is ordered separately for mounting where no power feed is required



TOOLS

- AIOJOINERTOOL** Tool Required To Use Mechanical Joiner
(1 Per Installation needed)
- AIOCLENSTOOL** Tool Required to remove Lens
(1 Per Installation Needed)



Hanging Kit includes canopy and power feed (A-HCPF606WH5W or A-HCPF612WH5W)




Non power feed side (A-HCNPF606WH or A-HCNPF612WH)



Joiner (AIOJOINER-SA)



Harness (AIOC5WMFH)

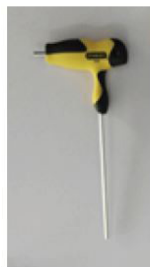

Joiner Tool (AIOJOINERTOOL)



Lens Tool (AIOCLENSTOOL)

Dimensions and specifications subject to change without notice.

