

APPLICATIONS

The BOLRR-LED and the BOLRS-LED Reveal Bollards with polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70W MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings, and medical facilities.

FEATURES & BENEFITS

- ◆ Min CRI 80
- ◆ $L_{70} > 187000$ hrs. at 25°C
- ◆ Mounting kit with 8" anchor bolts included
- ◆ THD < 20%, PF > 0.90
- ◆ Standard 2kV surge protection
- ◆ Clear lens to seal LED array
- ◆ Textured architectural bronze or black powdercoat finish over a chromate conversion coating
- ◆ IP66 sealed LED compartment
- ◆ $c_{CSA_{US}}$ listed for wet locations
- ◆ 5 year warranty for -40°C to +40°C

BOLRR

BOLRS



ORDERING DATA

EXAMPLE: BOLRR-LED20DMVBK40

BOLR		LED		Wattage/Lumens		Driver		Finish ²		Color Temp		Options	
Series	BOLR Reveal Round & Square Bollards	Gear	LED	20	20.2 Watts ¹	DMV	120-277VAC 0-10V Dimmable to 10%	BK	Black	40	4000K	SF	Single Fuse
					¹ See Lumen chart below	D347	347VAC 0-10V Dimmable	BZ	Bronze	50	5000K	DF	Double Fuse
												SP	Surge Protection
												GF1	GFCI outlet, 15A, 120V (120V operation only)
Type	R Round S Square												

Lumen Chart									
	4000K			5000K					
	B	U	G	B	U	G	B	U	G
BOLRR w/ Clear Array Lens	1	2	1	1	2	1	1	2	1
BOLRS w/ Clear Array Lens	1	2	1	1	2	1	1	2	1

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME


TYPE

DIMENSIONS

BOLRR

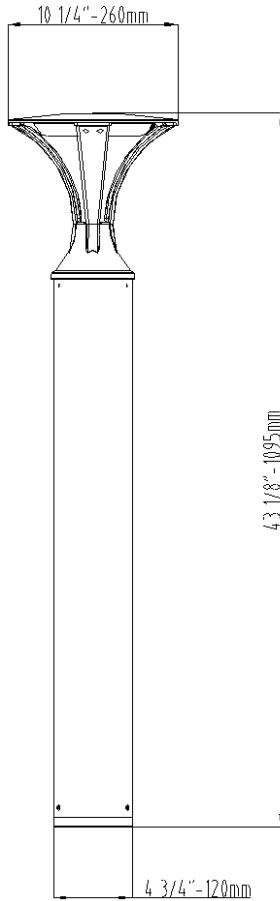

BOLRS

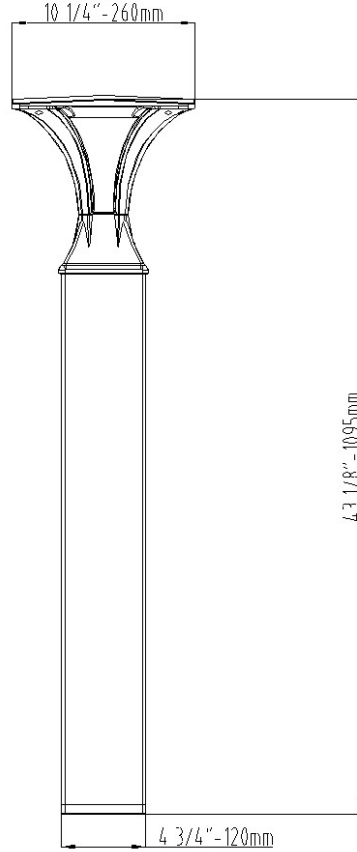

Dimensions and specifications subject to change without notice.

