

### APPLICATIONS

This architectural, decorative circline can be either surface or pendant mounted and is available in 4 different sizes. The diffuser is specially designed for direct LED to offer a nice smooth light distribution. This fixture is perfect for lobbies, reception areas, and conference rooms.

### FEATURES & BENEFITS

- ◆ Min CRI 80
- ◆ Operating temperature -40°C to 55°C
- ◆ L<sub>70</sub> > 50,000 hours
- ◆ Die-formed and welded 22-gauge cold rolled steel
- ◆ Knockouts on back allow easy access wireway mounting
- ◆ Pendant or surface mount
- ◆ 5 year warranty



### ORDERING DATA

EXAMPLE: CIR48-LED184DMV40

CIR		LED		Driver		Finish		Lens		Color Temp	
Series	Size	Gear	Wattage & Lumens	DMV	0-10V Dimmable	(Blank)	White	(Blank)	Frosted	30	3000K
Pendant/Surface Mount Round Fixture	24 24 inch 36 36 inch 48 48 inch 60 60 inch	LED	92 92 Watts 9600 Lumens 138 138 Watts 10350 Lumens 184 184 Watts 13800 Lumens 230 230 Watts 17250 Lumens			BK	Black	Acrylic		35	3500K
						SI	Silver			40	4000K
										50	5000K

### Options


CIRHDW	Hardware for surface mount
HC1201WH	Cable kit with 6' cable & 3 wire power feed/cable incl. white canopy and engineering bracket
HC12015WWH	Cable kit with 6' cable & 5 wire power feed/cable incl. white canopy and engineering bracket
HC1201WH	Cable kit with 12' cable & 5 wire power feed/cable incl. white canopy and engineering bracket
HC12015WWH	Cable kit with 12' cable & 5 wire power feed/cable incl. white canopy and engineering bracket

Dimensions and specifications subject to change without notice.




**DIMENSIONS**


**2 ft. - Back**

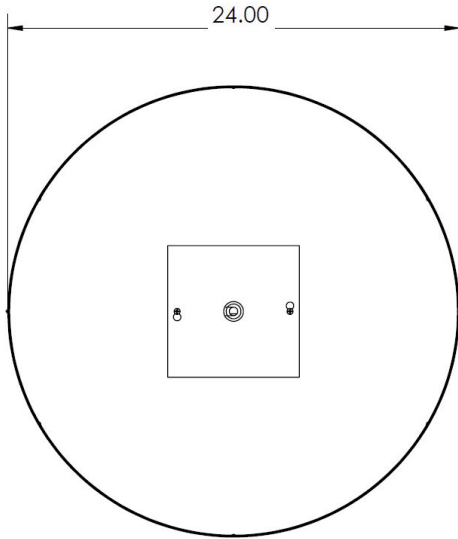

**3 ft. - Back**

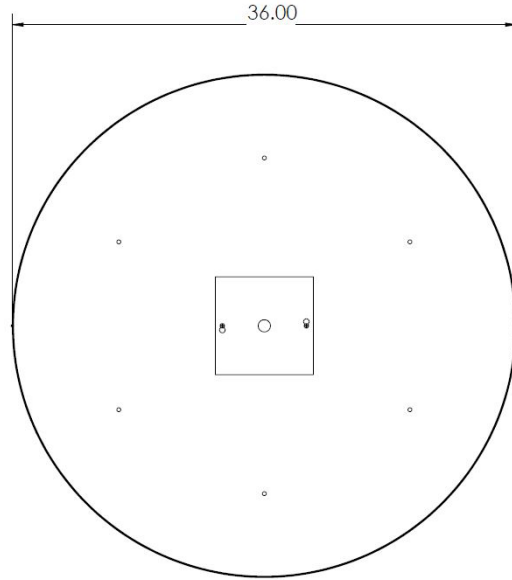

**4 ft. - Back**

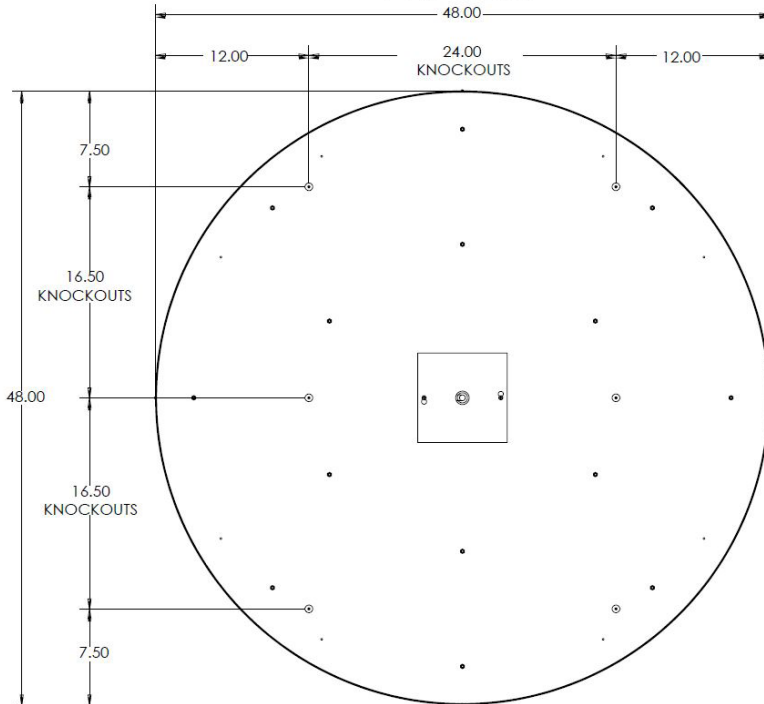

**Side View**



Dimensions and specifications subject to change without notice.

