

### APPLICATIONS

A puff of light to illuminate the most discriminating office or home. A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels. The diffuser is a custom compounded LED frosted acrylic sheet .110" thick providing smooth general lighting with no pixelation. Added impact modifier in the acrylic enhances the durability.


### DIMENSIONS

**24"**: 9.24W x 26.75L x 3.20Dp

**48"**: 9.25W x 49.75L x 3.20Dp

### SPECIFICATIONS

All metal parts are die formed from heavy gauge cold rolled steel housing spot welded to ensure uniformity and dimensional stability.

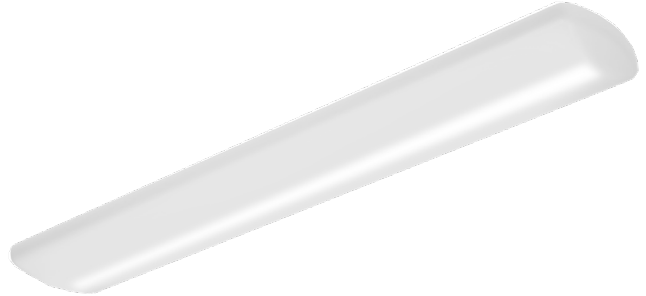

### ORDERING DATA

**EXAMPLE: CLPMW-48LED42D12040**

Series		Lens		Size		Gear		Wattage/Lumens		Driver		Color Temp	
CLP		MW	Matte White	24	24 inches	LED		<u>24 in.</u>		D120	120V Triac Dimmable**	30	3000K
				48	48 inches			20	20 Watts 2250 Lumens	DMV	120-277 VAC 0-10V Dimmable	35	3500K
								24	24 Watts 2600 Lumens			40	4000K
								28	28 Watts 3000 Lumens		**Only available in 24 Watts and 42 Watts	50	5000K
								<u>48 in.</u>					
								40	40 Watts 4550 Lumens				
								42	42 Watts 3819 Lumens*				
								48	48 Watts 5200 Lumens				
								57	57 Watts 6050 Lumens				

\*Only available with D120 option

Dimensions and specifications subject to change without notice.

