

APPLICATIONS

The CPYRA provides exceptional glare control and wide distribution. The rounded shape ensures good impact strength while maintaining a pleasant appearance. This fixture is ideally suited for canopy, parking garage, storage areas, shopping area walkways, entryways, and low level security.

FEATURES & BENEFITS

- ◆ Sealed die-cast profile for indoor and outdoor applications
- ◆ Replaces 100W MH to 175W MH
- ◆ Optional bi-level motion sensor
- ◆ Ambient operating temperature -40°C to 45°C (-40°F to 113°F)
- ◆ ^cUL_{US} listed
- ◆ 5 year warranty



ORDERING DATA

EXAMPLE: CPYRA12-LED30DMVWH40

CPYRA		12		LED							
Series		Size		Gear		Wattage/Lumens¹		Driver		Color Temp	
CPYRA		12 12" Diameter		LED		30 30 Watts 3800 Lumens 45 45 Watts 5500 Lumens 60 60 Watts 7600 Lumens		DMV 120-277VAC 0-10V Dimmable		40 4000K ³ 50 5000K	
		Distribution				¹ Lumens at 4000K w/ low bay distribution		Finish		³ Special order only	
		(Blank) Low Bay PG Parking Garage						WH White			
								² Consult for other options		Options	
										OS Occupancy sensor EM Emergency battery backup	

DLC INFORMATION

DLC Listed Fixtures		
Model Number	Options	DLC Listing
CPYRA12PG-LED45DMVWH40	OS	Premium
CPYRA12PG-LED45DMVWH50	OS	Premium




Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#		
JOB NAME	TYPE	

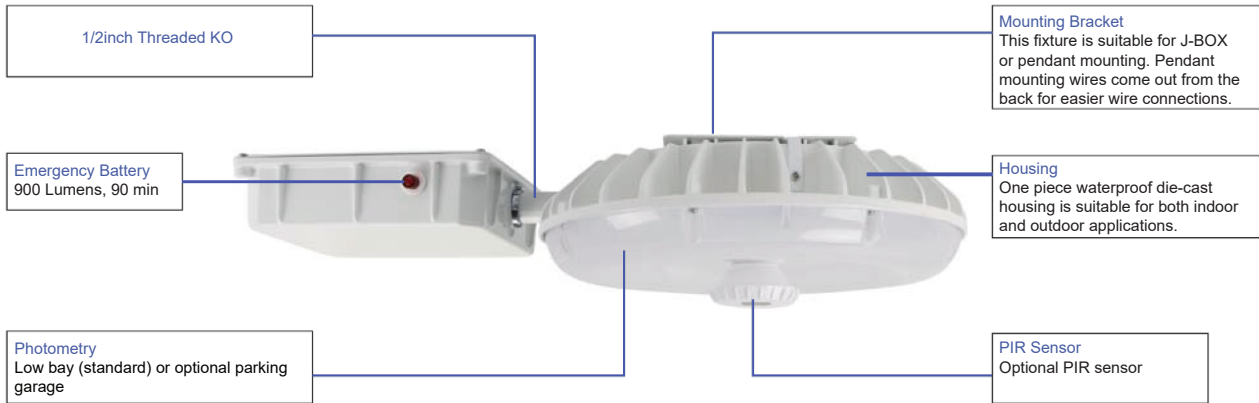

DIMENSIONS

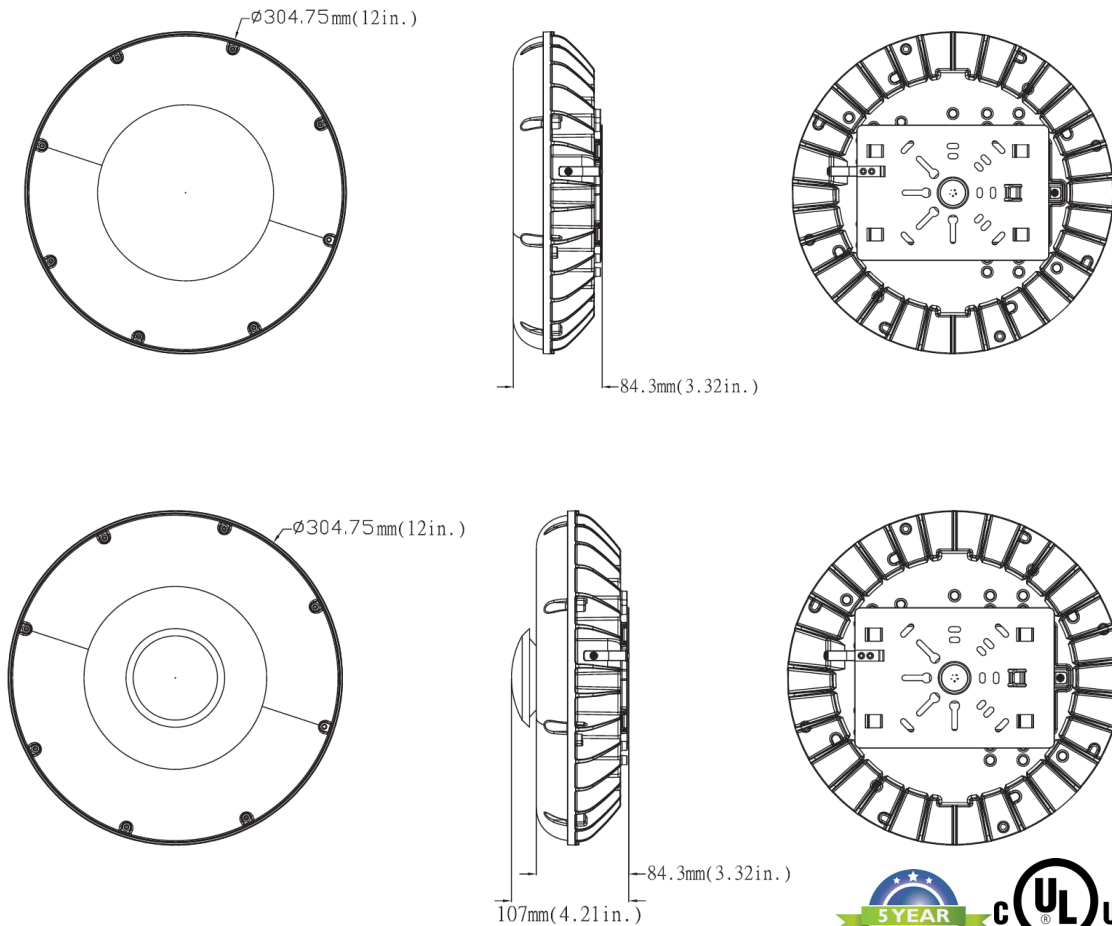


Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE

PHOTOMETRIC DATA

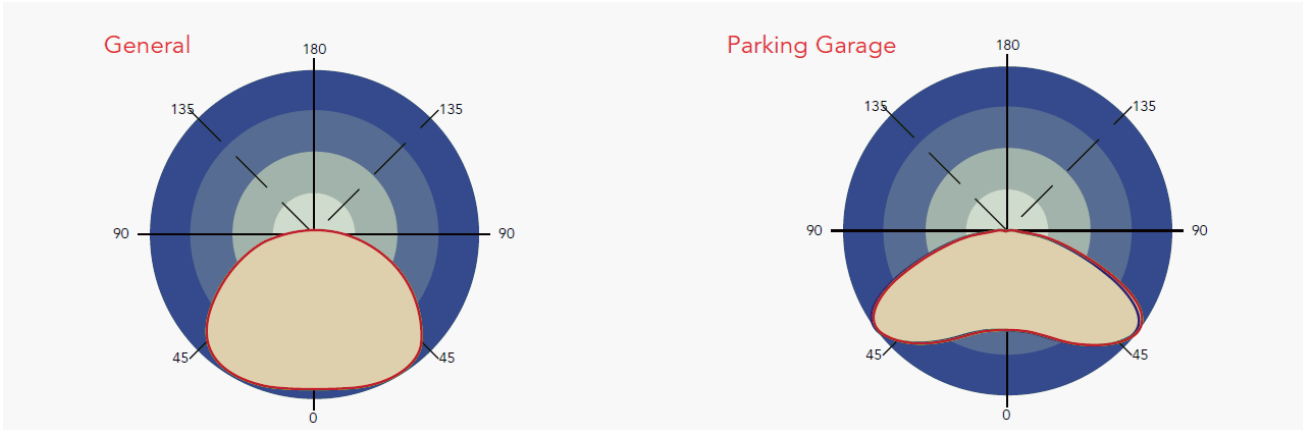

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	