

APPLICATIONS

The CSLS-LED linear spread fixture is ideal for open offices or any place where low glare, comfortable lighting is required. It is especially good for applications where a lot of monitors are in use. Fixtures can be used individually or joined for a continuous run. The connections between the housings are made by means of a concealed locking mechanism that provides a hairline joint in continuous row applications. The housing can be customized by specifying perforations on the bottom sides parallel to the center slot, perforations on the top sides, or both. You design the look you want to achieve!



FEATURES & BENEFITS

- ◆ Indirect/direct light. Indirect is 70% and direct is 30%
- ◆ Direct component is controlled by 3" wide semi-specular aluminum baffles with standard or opaque overlay
- ◆ All reflectors necessary for performance are supplied standard
- ◆ Highest quality long life LED
- ◆ Double the life expectancy of fluorescent technology
- ◆ 5 year warranty

ORDERING DATA

EXAMPLE:CSLSMWSS48-LED48DMVWH40

CSLS		LED		Driver		Finish		Color Temp		Configuration	
Series CSLS LED Linear Spread Light	Side Body S Solid P Perforated	Gear LED	Length 48 48 inch 96 96 inch	DMV 120-277VAC 0-10V Dimming Multivolt	WH White (Std) SL Metallic Silver RD Red	30 3000K 35 3500K 40 4000K	IN Iron BK Black BZ Bronze	50 5000K	Blank Individual -B Beginner Run -E Ender Run -J Joiner		
Center Body MW Matte White LV Louver	Upper Body S Solid P Perforated	Light Distribution Blank Uplight Only 2U1D 2/3 Uplight by wattage 1/3 Downlight by wattage	Wattage/Lumens 4 Ft. 48 48W 4000 Lumens 57 57W 4500 Lumens 72 72W 5700 Lumens 85 85W 6550 Lumens 8 Ft. 97 97W 7900 Lumens 114 114W 8950 Lumens 144 144W 11500 Lumens 4 Ft. Up and Downlight 36 36W 2400U-1200D 54 54W 3600U-1800D 8 Ft. Up and Downlight 72 72W 4800U-2400D 108 108W 7200U-3600D								
Options											
H4W3 HC301 Cable kit with 4' cable & power feed. Cable incl.w/white canopy (3 wire) *non-dimming H12W3 HC302 Cable kit with 12' cable & power feed. Cable incl. w/white canopy (3 wire) *non-dimming H4W5 HC301 Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire) H12W5 HC302 Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire) EM Emergency battery backup 500 Lumens EM14 Emergency battery backup 1400 Lumens *Consult factory for more options Plug In Options PI1 3 wire harness, including white, black and green PI2 4 wire harness, including white, black, green and blue for emergency battery backup PI3D 5 wire harness, including white, black, green, violet and gray											

*Lumen outputs are approximate and vary by body style.

Dimensions and specifications subject to change without notice.



800-444-WATT ♦ www.mobern.com ♦

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME

TYPE

DIMENSIONS

4ft. - 9^{5/8}"W x 48"L x 2^{1/2}"H
8ft. - 9^{5/8}"W x 96"L x 2^{1/2}"H

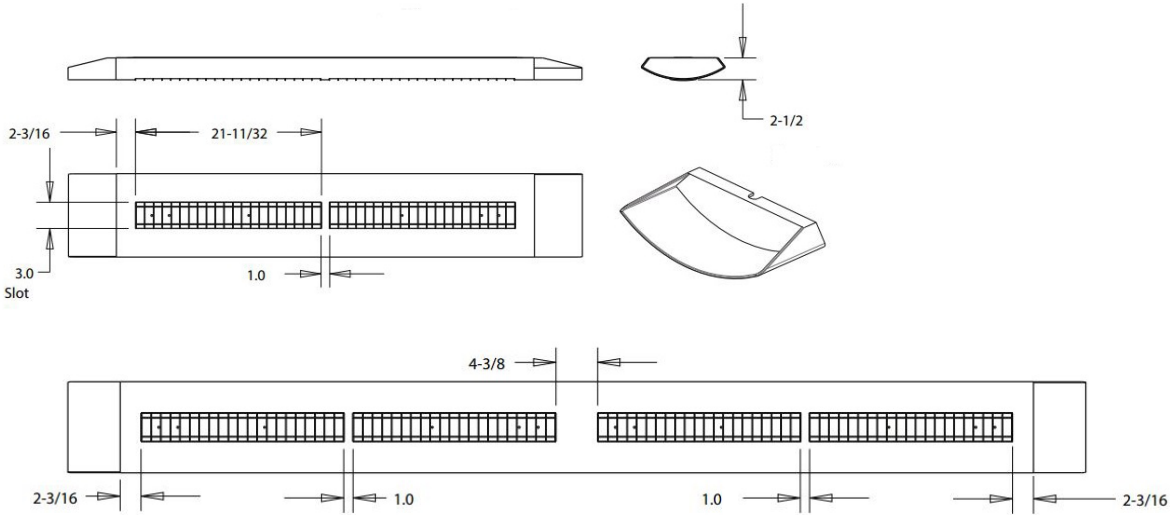

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE