

APPLICATIONS

Sleek in design, the Mobern **D2D-LED** dusk to dawn fixture utilizes the latest in LED single source array. This dusk to dawn provides prismatic-designed light output for any environment. Standard with a NEMA approved Photocontrol which used with LED maximizes energy savings. Maintaining all the strengths of the traditional dusk to dawn fixtures such as installation brackets and arms while utilizing the latest generation of LEDs. Ideal for parking lots, warehouse, commercial, farm, and residential areas

FEATURES & BENEFITS

- ◆ Die cast housing
- ◆ Architectural grey UV resistant powder coat finish
- ◆ Highest quality long life LEDs
- ◆ Input voltage: 120~277V AC
- ◆ Twist lock 120V photocell - standard
- ◆ Input power — approx. 45 Watts
- ◆ Lumens per LED — approx. 90~95
- ◆ Low starting temp -40OC
- ◆ **5 Year Warranty**
- ◆ UL listed / CUL listed



SPECIFICATIONS


Housing is a Heavy-duty corrosion resistant die-cast metal construction with a architectural grey UV resistant powder coat finish. LED array is CREE. Sturdy mounting arm installs to walls or poles Replaceable NEMA rated photo control. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: D2D-LED40MV50PC

D2D	LED	40	MV	50	PC	D2DARM
Series	Gear	Wattage/Lumens	Driver Type	Color Temp	PC	Options
D2D LED Dusk to Dawn	LED	40 40 Watts 3194 Lumens	MV 120-277VAC Multivolt	50 5000k	PC Photocell Twistlock 120V only	D2DARM Arm

DIMENSIONS

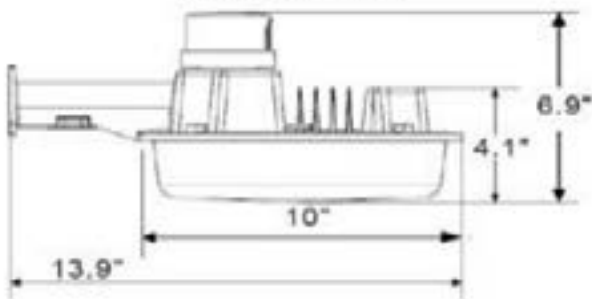

Optional Mounting System



Dimensions and specifications subject to change without notice.

CAT#			
JOB NAME		TYPE	