

APPLICATIONS

The FHBF series is the workhorse of our high bay fluorescent series, designed especially for high light output. The fixtures uses premium mirrored reflectors for high efficiency lighting. A sturdy/durable fixture body with superior appearance and appeal, suitable for commercial, retail and industrial applications. Mounts easily with chain or cable kit.

FEATURES & BENEFITS

- ◆ Four lamp positions
- ◆ Baked white enamel code gauge steel.
- ◆ Premium full specular mirrored reflector
- ◆ Multiple KOs and access plate
- ◆ 4 point chain mount
- ◆ White aluminum reflector available
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location

SPECIFICATIONS

Body and ends are die blanked, pierced and formed of 22 gauge cold rolled prime steel for rigidity and uniformity. Forming of the housing has been engineered to provide added strength along its entire length. This fixture is not designed to be surface mounted to the ceiling or wall. Listed by and bears **UL** label.



ORDERING DATA

EXAMPLE: FHBF-654WMV

Series		# of Lamps		Length		Ballast Type		Options	
FHBF		4 4 Lamp 6 6 Lamp		(Blank) 4' length TAN 8' length		MV Electronic 120V to 277V 120 Electronic 120V 277 Electronic 277V R120 Residential Electronic 120V PMV Program Start Multivolt D120 120V Dimming D277 277V Dimming DDT Sylvania T8 Dual Tap Dimming SD Step Dim Multi Volt LD120 120V Lutron Dimming LD277 277V Lutron Dimming		B1 T8/T5 1L 500 Lumens Battery Backup (B11) B2 T8/T5 1L/2L 700 Lumens Battery Backup (B48) B3 T8/T5 1L/2L 1400 Lumens Battery Backup (B223) B4 T8/T5 1L/2L 3000 Lumens Battery Backup (B510) *Remote mount only B51 T5HO 1L 500 Lumens Battery Backup (B625) B52 T5HO 1L 800 Lumens Battery Backup (B585) B53 T5HO 1L 1300 Lumens Battery Backup (B626) GR Greenfield 3 Wire GR1 Greenfield 4 Wire RIF Radio interference filter SS Integral Smart Sense OS External Occupancy Sensor	
Lamp Type		Reflector Type							
32 48" T8 32TAN 48" T8 tandem 54 46" T5HO 54TAN 46" T5HO tandem		Blank MIRO4 W Enhanced white aluminum							

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Sold on the side


A-FHBFWG - Wire Guard 4 or 6L Galv.
A-FHBFWG-WH - Wire Guard 4 or 6L White

Dimensions and specifications subject to change without notice.



DIMENSIONS

TOP VIEW

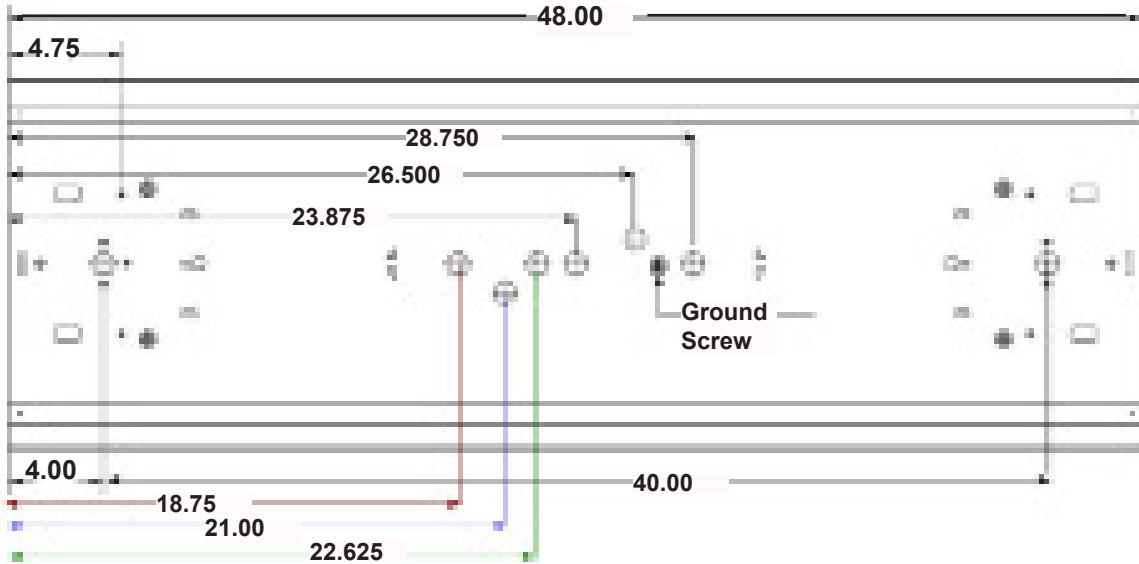

*Top of housing width is 11 5/8"

Dimensions and specifications subject to change without notice.

