

APPLICATIONS

The FHBRP series is offered with baffles to cut glare and is dressed for applications requiring aesthetic appeal. Available with white gear trays for wider distribution or standard without reflector for good economical performance. Mounting options include chain, stem or pendant cable. Custom paint finishes available. Ideal for retail applications.

FEATURES & BENEFITS

- ◆ 0-10V Dimming
- ◆ Designed for pendant, stem or chain hanging
- ◆ Mounting holes are provided for simple, fast installation
- ◆ Every fixture is individually tested
- ◆ 91% Reflectivity
- ◆ ^CETL_{US} listed for damp location
- ◆ Min CRI 82

SIZE W x L x H in inches

4 ft. - 11.25W x 48L x 4.25H
8 ft. - 11.25W x 96L x 4.25H



MOUNTING

Designed for pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

SPECIFICATIONS

Housing is 22 gauge prepainted steel. Air vents surround the driver and boards in the back of the fixture to maximize performance, reliability and life. Enhanced white gear trays are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for driver maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, and cable kit. Integral Occupancy Sensor is optional and is ideal for wire guard applications. This fixture is not designed for surface mounting on ceiling or wall.

ORDERING DATA

EXAMPLE: FHBRP48LED32DMV40

FHBRP		LED		DMV		Color Temp		Options		
Series	Size	Gear	Wattage		Driver Type					
FHBRP	48 48 inch	LED	4 ft		DMV	120-277V Multivolt	30	3000K	CS	6 ft. 3 wire
LED Premium Baffle High Bay	96 96 inch		32	32 Watts 3450 lumens		0-10V Dimmable	35	3500K	CS8	8 ft. cord, no plug
			48	48 Watts 5640 lumens	SDMV	Step dimming Multivolt	40	4000K	CS12	12 ft. cord
			57	57 Watts 6400 lumens			50	5000K	WP	6 ft. 3 wire, whip
			8 ft		DHV	347-480VAC			WP10	6 ft. 3 wire, whip
			97	97 Watts 11300 lumens		0-10V Dimming			EM	10W, 1200 lumen, battery backup
			114	114 Watts 12800 lumens	D347V	347VAC			EM5	5W, 600 lumen battery backup
			144	144 Watts 19500 lumens		0-10V Dimming			EM7	7W, 840 lumen battery backup
					TDMV	Triac Dimming				
						120-277VAC				
					D120	Triac Dimming				
						120VAC				
					D277	Triac Dimming				
						277VAC				

Dimensions and specifications subject to change without notice.




CAT#	
JOB NAME	TYPE

TECHNICAL INFORMATION

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)	Kelvin Temperature	CRI
48"	32	3450	108	3000k 3500k 4000k 5000k	80+
48"	48	5650	118	3000k 3500k 4000k 5000k	80+
48"	57	6400	112	3000k 3500k 4000k 5000k	80+
96"	97	11300	116	3000k 3500k 4000k 5000k	80+
96"	114	12800	112	3000k 3500k 4000k 5000k	80+

DIMENSIONS

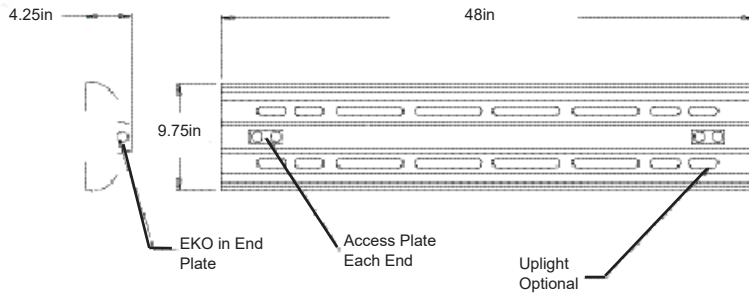

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	