

### APPLICATIONS

Modern technology and design produced the high performance industrial which is excellent for areas requiring high levels of illumination. This energy efficient substitute for HID is ideal for retail, warehouse, commercial and manufacturing areas.

### FEATURES & BENEFITS

- ◆ Available in lengths from 24 to 96 inches -(2', 4' and 8' lengths)
- ◆ Surface, stem or chain mountable
- ◆ Uses T5 or T8 lamps
- ◆ Improved light output and greater color rendition than HID
- ◆ Standard MIRO 4 silver reflector provides 94% reflectivity
- ◆ Instant re-strike capability
- ◆ Every fixture individually tested
- ◆ UL listed for damp location



### SPECIFICATIONS

Housing is die-formed from cold rolled steel. Reflector is specular anodized MIRO 4 silver aluminum. Fixtures are to be stem or chain mounted. Versatile end plate doubles as coupler for continuous row mounting. Knockouts are provided for flexible conduit attachment. Recommended for heights less than 20 feet. Listed by and bears **UL** label.

### ORDERING DATA


**EXAMPLE: HPI 2 32 UP ELO DT B1**

Series		# of Lamps	Lamp Size		Reflector	Options
<b>HPI</b>	<b>1</b>	1 Lamp	<b>17</b>	T8 24"	<b>Blank</b> Solid MIRO 4 silver reflector	<b>B1</b> T8 Battery Backup 1 lamp
	<b>2</b>	2 Lamp	<b>24</b>	T5HO 24"		<b>B2</b> T8 Battery Backup 2 lamp
	<b>3</b>	3 Lamp	<b>32</b>	T8 48"	<b>TAN</b> 8' length (available in 1 & 2 lamps)	<b>B3</b> T5 Battery Backup 1 lamp
	<b>4</b>	4 Lamp	<b>54</b>	T5HO 46"		<b>B4</b> T5 Battery Backup 2 lamp

**A348K** - Wireguard 3 or 4 light with 4 clips and screws (Wireguard to be field installed)

**A142** - Jack chain (order per foot)

**A347** - S hook



**A346** - 7.5" Y hanger

- B1** T8 Battery Backup 1 lamp
- B2** T8 Battery Backup 2 lamp
- B3** T5 Battery Backup 1 lamp
- B4** T5 Battery Backup 2 lamp
- O1** Occupancy Sensor
- +** 2 Ballasts
- RF** Radio Interference filter
- \*Call for additional options**

\*See chart below for whip & cord ordering options


#### \*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
<b>WP</b> - Whip	<b>(Blank)</b> 3 Wire	<b>(Blank)</b> 6 feet	<b>(Blank)</b> No Plug	<b>BK</b> - Black	<b>(Blank)</b> 120-277V	<b>15</b> - 15 Amps
<b>CS</b> - Cordset	<b>4</b> - 4 Wire	<b>8</b> - 8 feet	<b>P*</b> - Standard Plug	<b>WH</b> - White	<b>120</b> - 120V	<b>20</b> - 20 Amps
	<b>5</b> - 5 Wire	<b>10</b> - 10 feet	<b>TL*</b> - Twist Lock		<b>277</b> - 277V	
	<b>6</b> - 6 Wire	<b>12</b> - 12 feet			<b>347</b> - 347V	
		<b>15</b> - 15 feet			<b>480</b> - 480V	


Dimensions and specifications subject to change without notice.



**DIMENSIONS**



**1 and 2 Light**

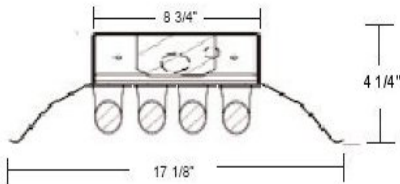

**3 and 4 Light**

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	