


APPLICATIONS

A linear 2x3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 2x3 Series fixtures can be installed individually or in a continuous run. Specifically designed for direct/indirect lighting with snap-in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.

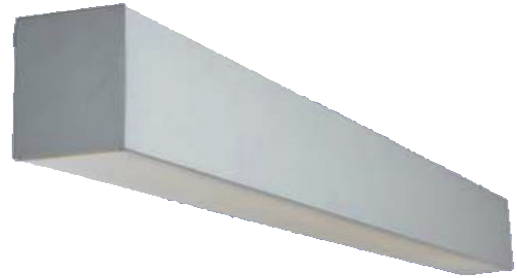

FEATURES & BENEFITS

- ◆ Accepts various lenses or louvers.
- ◆ Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.
- ◆ ETL listed for damp locations
- ◆ CRI 80+

SPECIFICATIONS

Die-formed and welded 22 gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separating lamps compartments for each. Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in lens is ideal for uplight.

ORDERING DATA

EXAMPLE: L23PMW48LED45DMVWH40

Series		Length	Gear	LED Module Distribution		Finish	Color Temp	Configuration	
L23W Wall Mount		48 48 inch	LED	Blank	Downlight (std)	WH White	30 3000K	Blank	Individual
L23P Pendant Mount		96 96 inch		U	Uplight	BK Black	35 3500K	-B	Beginner Run
L23S* Surface Mount				1U2D	Uplight & Downlight	SI Silver	40 4000K	-E	Ender Run
							50 5000K	-J	Joiner
Lens Material		Wattage & Lumen		Driver & Voltage					
MW	Matte white lens (std) Only available for down light	<u>Up or Down Light</u>		DMV 120-277VAC Dimming Multivolt, 0-10V					
SF	Snap-in frosted acrylic lens (85% transmission) Special for LEDs. (Only available for uplight & downlight)	<u>4 ft.</u>							
		26	26 Watts	1670 Lumens					
		38	38 Watts	2260 Lumens					
		45	45 Watts	2510 Lumens					
		<u>8 ft.</u>							
		52	52 Watts	2900 Lumens					
		76	76 Watts	3940 Lumens					
		90	90 Watts	4410 Lumens					
		<u>1 Up & 2 Down Only</u>							
		<u>4 ft.</u>							
		36	36 Watts	820U-990D					
		54	54 Watts	1205U-1455D					
		<u>8 ft.</u>							
		72	72 Watts	1640U-1980D					
		108	108 Watts	2410U-2910D					
Options									
HC301WH		Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy							
HC301WH5W		Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)							
HC302WH		Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy							
HC302WH5W		Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire)							
2SCS24WH		Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture							
Plug in Options									
PI1		3 wire harness, including white, black and green							
PI2		4 wire harness, including white, black, green and blue for emergency backup							
PI3D		5 wire harness, including white, black, green, violet and gray							

(For Before Drywall Installation)

Flange To Sit On
Surface Of Drywall
(For Existing Drywall
Installation.)

*Downlight Only

*Consult factory for more options

Dimensions and specifications subject to change without notice.



800-444-WATT ♦ www.mobern.com ♦

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME

TYPE


**WALL MOUNT
48L Drawing**

.875 KNOCKOUT DISTANCES

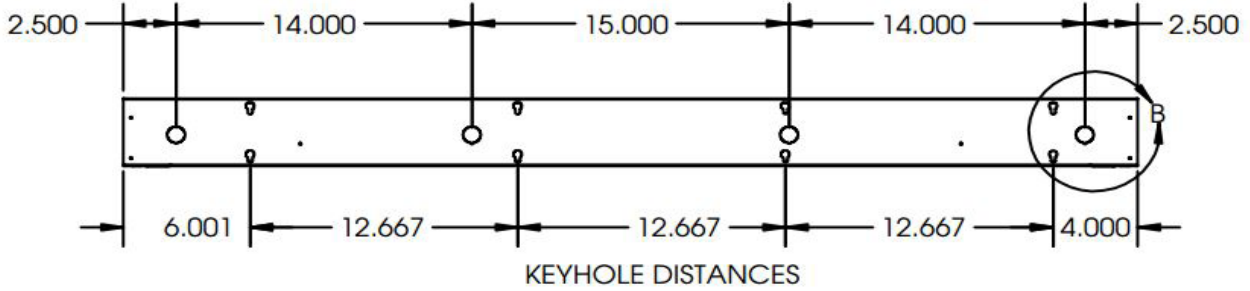

**SURFACE MOUNT
96L Drawing**

.500 KNOCKOUT DISTANCES

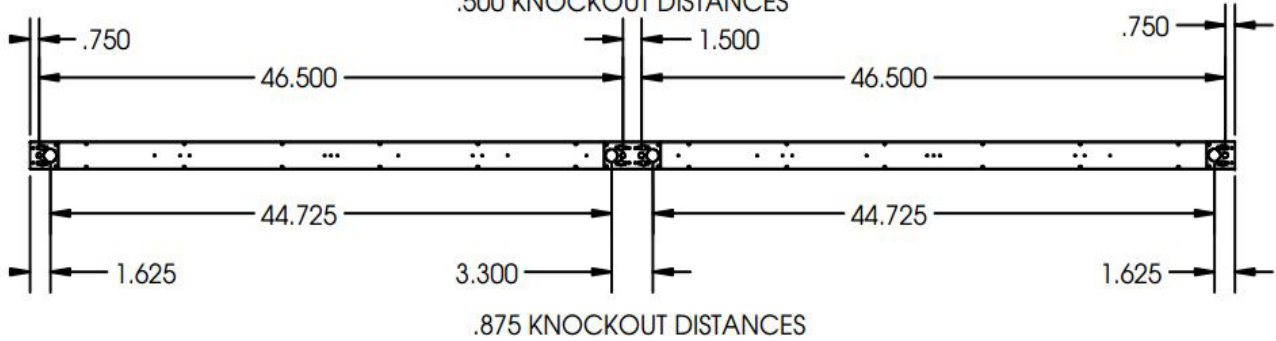


.875 KNOCKOUT DISTANCES


Flange Details

Surface Mounted/Pendant Mounted


Type RR
Recess for Drywall/
Hard Ceiling
-RR (1/2 inch)
-RR650 (5/8 inch)
-RRxxx (custom depth)



Type RF
Flush for Drywall



Type R
For 1" T-bar

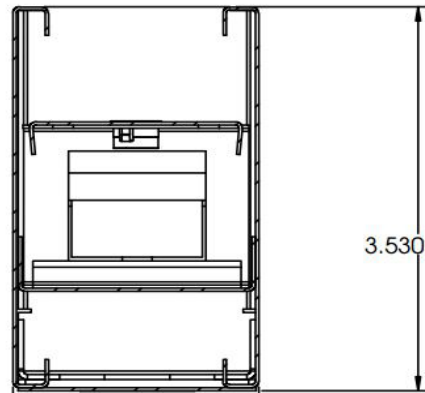

Up or Down Light



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE