

### APPLICATIONS

The linear 4x4 pendant or surface mounted fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x4 Series fixtures can be installed individually or in group patterns.

### FEATURES & BENEFITS

- ◆ 2 or 4 lamp positions
- ◆ Fixtures can be surface mounted to the ceiling, recessed in ceiling or pendant hung by stem or cable
- ◆ Accepts various lenses or louvers
- ◆ 8' units have a steel mullion to join two individual diffusers
- ◆ Consult factory for other lengths
- ◆ Optional welded light-leak flanges are available on ends
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location



### SPECIFICATIONS

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have two rows of 1/2" x 4" apertures along the top of the housing to provide approximately 12% uplight for ceiling illumination.

### ORDERING DATA

EXAMPLE: L44RSW228MVWH




Series	Mounting	Direct/Indirect	# Lamps	Lamp Type	Ballast	Finish
L44	<b>R</b> Regular Recess Lay-in	<b>Blank</b> Recessed Surface or Wall Direct only	<b>1</b>	<b>14</b> 24" T5	<b>MV</b> 120-277VAC Multivolt	<b>WH</b> White
<b>Reflector</b>	<b>RF</b> Recessed with Flange*	<b>I</b> Indirect only	<b>2</b>	<b>17</b> 24" T8	<b>DMV</b> 0-10V Dimming 120-277VAC Multivolt	<b>SL</b> Silver
<b>Blank Standard</b>	<b>RR</b> Recessed for Dry Wall 1/2"	<b>DI</b> Direct w/Indirect Slots	Per cross section	<b>21TAN</b> 2-36" TAN T5	<b>R120</b> Residential 120V Ballast	<b>BK</b> Black
<b>WW</b> Wall wash	<b>S</b> Surface/Pendant Direct only			<b>24</b> 24" T5HO	<b>PMV</b> Program Start Multivolt	<b>BZ</b> Bronze
	<b>W</b> Wall Mount Direct only			<b>24TAN</b> 2-24" TAN T5HO	<b>LED**</b> Wired 1 end hot for T8 LED lamps	<b>IN</b> Iron
	* RF for sheetrock installation			<b>25</b> 36" T8	<b>LED2E**</b> Wired 2 ends hot for T8 LED lamps	
		<b>Lens Options</b>		<b>25TAN</b> 2-36" TAN T8		
		<b>SW</b> Smooth White .100 thick lens (Standard)		<b>28</b> 46" T5		
		<b>S.5</b> Specualr parabolic louver (1/2"x1/2"x3/8")		<b>28TAN</b> 2-46" TAN T5		
		<b>SF</b> Snap-in frosted lens		<b>32</b> 48" T8		
		<b>LV</b> Baffled louver		<b>32TAN</b> 2-48" TAN T8		
		<b>A</b> Prismatic Acrylic #12 Pattern		<b>39</b> 36" T5HO		
				<b>54</b> 46" T5HO		
				<b>54TAN</b> 2-46" TAN T5HO		

Notes:  
Example: SDI Surface/Pendant Direct w/Indirect Slots  
WI Wall Mount Indirect only

\*\* Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps. Lamps not included

Options	Plug In Options for Continuous Runs
<b>B1</b> T8/T5 1L500 lumen battery backup	<b>PI1</b> 3 wire harness, including white, black and green
<b>B2</b> T8/T5 1L/2L 700 lumen battery backup	<b>PI2</b> 4 wire harness, including white, black, green and blue for emergency battery backup
<b>B3</b> T8/T5 1L/2L 1400 lumen battery backup	<b>PI3D</b> 5 wire harness, including white, black, green violet and grey for dimming
<b>B51</b> T5HO 1L 500 lumen battery backup	
<b>B52</b> T5HO 1L 800 lumen battery backup	
<b>B53</b> T5HO 1L 1300 lumen battery backup	
<b>L841</b> Lamps installed 841K	
<b>L835</b> Lamps installed 835K	
<b>HC301WH</b> Cable kit w/4' cable + power feed cable incl.w/white canopy	
<b>HC302WH</b> Cable kit w/12' cable + power feed cable incl.w/white canopy	

Dimensions and specifications subject to change without notice.

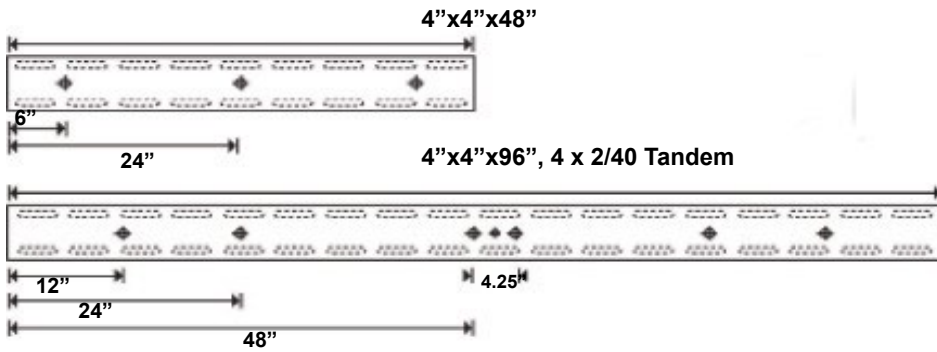

For Wall Wash version,  
add "WW" after L44

### OPTIONS

- HC301WH Cable kit with 4 cable + power feed cable included with white canopy
- HC302WH Cable kit with 12 cable + power feed cable included with white canopy
- Stem kits sold separately

### NOTES

- [1] Consult Factory for additional lamps, ballasts, finishes, and options.
- [2] Consult factory for recessed version

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE