

APPLICATIONS

The linear 4x5 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x5 Series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS

- ◆ Fixtures can be surface mounted, pendant recessed or cable
- ◆ Accepts various lenses or louvers
- ◆ 8' units have a steel mullion to join two individual diffusers
- ◆ Optional welded light-leak flanges are available on ends
- ◆ Every fixture is individually tested
- ◆ Min CRI 82
- ◆ ETL listed for damp location



FROSTED LENS
(acrylic snap-in lens)
Frosted: 85% efficient
SF Frosted Lens

SPECIFICATIONS

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity.

ORDERING DATA

EXAMPLE: L45PMW-48LED1U2D72DMVWH40

L45		LED		1U2D									
Series	Mounting	Size	Gear	Wattage & Lumens		Driver		Finish		Configuration		Color	
L45	W Wall Mount P Pendant	48 48" 96 96"	LED	36 36W 1200U-2400D 54 54W 1800U-3600D	4 ft.	DMV	120-277VAC Dimming Multivolt 0-10V	WH White BK Black SL Silver IN Iron BZ Bronze	Blank Individual -B Beginner Run -E Ender Run -J Joiner				
Direct			LED Module Distribution	72 72W 2400U-4800D 108 108W 3600U-7200D	8 ft.	FIDMV	Factory Inst. Dimming 120-277VAC 0-10V						
Indirect			1U2D Up and Down Light										
Reflector		Lens Options											
(Blank) No reflector		MW Matte White .100 thick lens (std)											
WW Wall wash		S.5 Specualr Parabolic Louver (1/2"x1/2"x3/8")											
		SF Snap-in Frosted Lens											
		LV Baffled Louver											

Options

HC301WH	Cable kit with 4 cable + power feed cable incl. with white canopy
HC301WH5W	Cable kit with 4' cable + power feed 0-10V dimming cable included with white canopy (5 wire)
HC302WH	Cable kit with 12' cable + power feed cable incl. with white canopy
HC302WH5W	Cable kit with 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)
EM	10W, 1200 lumen battery backup
EM7	7W, 840 lumen battery backup
EM5	5W, 600 lumen battery backup
Plug In System Options	
PI1	3 wire harness, including white, black, and green
PI2	4 wire harness, including white, black, green, and blue for emergency battery backup
PI3D	5 wire harness, including white, black, green, violet, and gray

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME


TYPE

DIMENSIONS

Uplight and Downlight View




Continuous Run End View

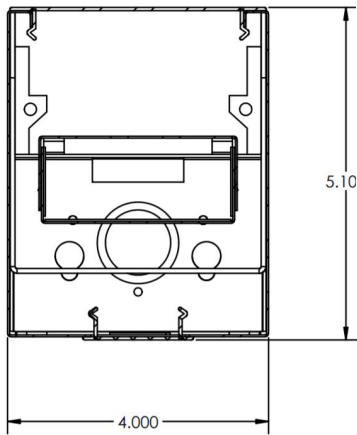


End View


48L Drawing



DETAIL B

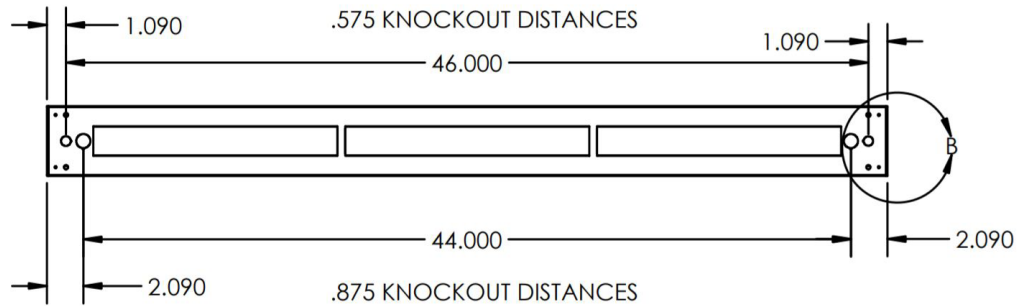

96L Drawing

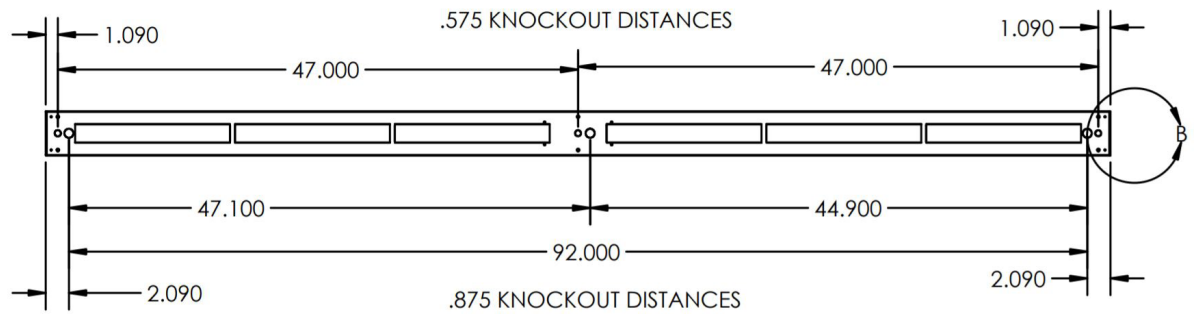

Dimensions and specifications subject to change without notice.

