


APPLICATIONS

The linear 4x5 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x5 Series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS

- ◆ Fixtures can be surface mounted, pendant recessed or cable
- ◆ Accepts various lenses or louvers
- ◆ 8' units have a steel mullion to join two individual diffusers
- ◆ Optional welded light-leak flanges are available on ends
- ◆ Every fixture is individually tested
- ◆ **ETL** listed for damp location



FROSTED LENS
(acrylic snap-in lens)
Frosted: 85% efficient
SF Frosted Lens

SPECIFICATIONS

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity.

ORDERING DATA

EXAMPLE: L45PMW-48LED1U2D72DMVWH40

Series	Mounting	Size	Gear	Wattage & Lumens	Driver	Finish	Configuration
L45 Direct Indirect	W Wall Mount P Pendant	48 48" 96 96"	LED LED Module Distribution 1U2D Up and Down Light	36 36W 1200U-2400D 54 54W 1800U-3600D 72 72W 2400U-4800D 108 108W 3600U-7200D	DMV 120-277VAC Dimming Multivolt 0-10V FIDMV Factory Inst. Dimming 120-277VAC 0-10V	WH White BK Black SL Silver IN Iron BZ Bronze	Blank Individual -B Beginner Run -E Ender Run -J Joiner
Reflector Blank WW Wall wash		Lens Options MW Matte White .100 thick lens (std) S.5 Specualr Parabolic Louver (1/2"x1/2"x3/8") SF Snap-in Frosted Lens LV Baffled Louver				Color 30 3000K 35 3500K 40 4000K 50 5000K	
Options							
		A-HC301WH Cable kit with 4 cable + power feed cable incl. with white canopy					
		A-HC301WH5W Cable kit with 4' cable + power feed 0-10V dimming cable included with white canopy (5 wire)					
		A-HC302WH Cable kit with 12' cable + power feed cable incl. with white canopy					
		A-HC302WH5W Cable kit with 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)					
		EM 10W, 1200 lumen battery backup					
		EM7 7W, 840 lumen battery backup					
		EM5 5W, 600 lumen battery backup					

Plug in Options: For continuous run applications by simply plugging sections together

Part Number	Description
PI1	3 wire harness, including white, black and green
PI2	4 wire harness, including white, black, green and blue for emergency battery backup
PI3D	5 wire harness, including white, black, green, violet and gray

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆


8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#


JOB NAME

TYPE

DIMENSIONS

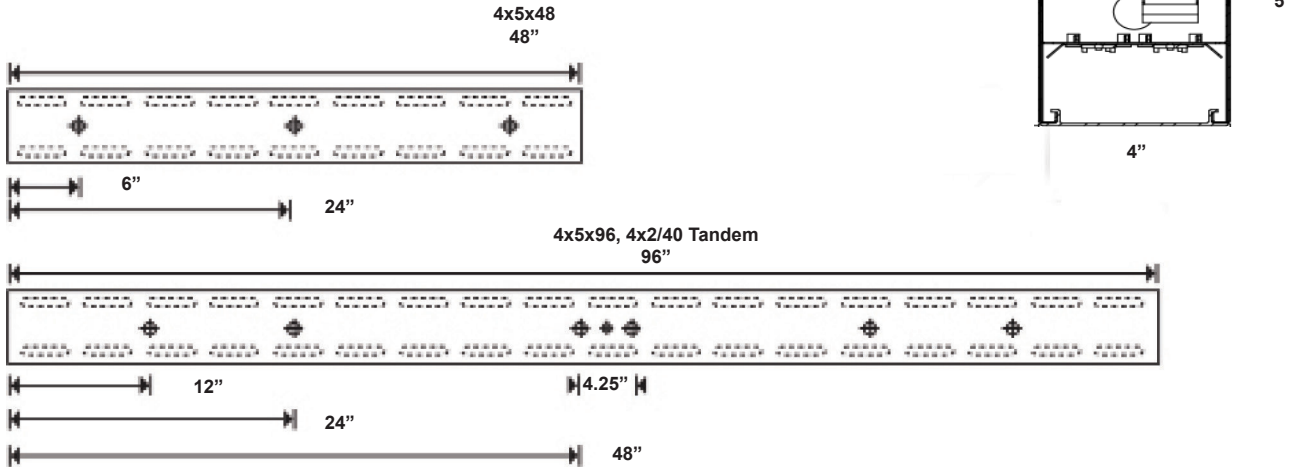

Type WW



For Wall Wash Version
add "WW" after L45

Dimensions and specifications subject to change without notice.

