

APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted powder coated flat white polyester finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.

FEATURES & BENEFITS

- ◆ Fully assembled housing is formed and welded 22 gauge steel chemically treated to resist corrosion and enhance paint adhesion
- ◆ Can be mounted individually or in continuous row
- ◆ Available with smooth frosted lens
- ◆ Knockouts on back accept standard electrical fittings (by others)
- ◆ Optional occupancy sensors, whips, fuses and cord set
- ◆ Optional sensor is self-contained, interchangeable and push-button programmable
- ◆ Surface or pendant mounted horizontally or vertically

SIZE:
2.83"H x 2.36"W x 23.60"L
2.83"H x 2.36"W x 47.25"L
2.83"H x 2.36"W x 94.43"L



Optional:
Add SS to the end of the part number for Occupancy Sensor

ORDERING DATA

EXAMPLE: LD23-24LED14FRDMVWH30


LD23		LED		FR		LED		FR		Finish		Color Temp		Configuration	
Series	Length	Gear	Wattage & Lumens		Lens	Driver		Finish		Color Temp		Configuration			
LD23	24 48 96	23.6" 47.15" 94.43"	LED	14 20 28 31 40 45	2 FT 4 FT 8 FT	FR Frosted	DMV SDMV DHV D347V D120 D277	120-277V Multivolt 0-10V Dimmable Step dimming Multivolt 347-480VAC 0-10V Dimming 347VAC 0-10V Dimming Triac Dimming 120VAC Triac Dimming 277VAC	WH White BK Black BN Brushed Nickel OR Orange IN Iron BZ Bronze	30 35 40 50	3000K 3500K 4000K 5000K	Blank -B -E -J	Individual Beginner Run Ender Run Joiner		

Options	
SS	Step Dim Sensor 50% Dim Level
OSD	Integral Daylight Occ sensor
HC401WH	Cable kit with 4' cable & power feed Cable incl. w/whitecanopy
HC401WH-5W	Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)
HC402WH	Cable kit with 12' cable & power feed Cable incl. w/white canopy
HC402WH-5W	Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)
2SCS24WH	Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture
Plug in Options	
P11	3 wire harness, including white, black and green
P12	4 wire harness, including white, black, green and blue for emergency backup
P13D	5 wire harness, including white, black, green, violet and gray

Options & Accessories:

Consult Buyers Guide or factory

DIMENSIONS

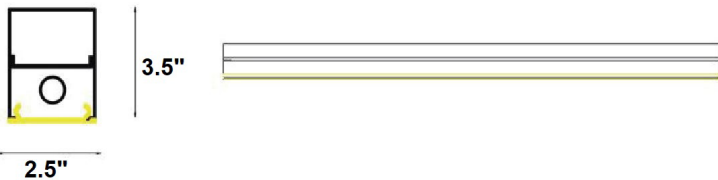

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup MD 20794

CAT#	
JOB NAME	
TYPE	