


APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted matte white finish (consult factory for other finishes). Scaled to the LED module the frosted diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.

FEATURES & BENEFITS

- ◆ Housing is formed and welded 22 gauge steel, that is chemically treated and powder coated for a beautiful finish and to resist corrosion
- ◆ Can be mounted individually or in a continuous row
- ◆ Ribbed frosted lens is standard
- ◆ Knockouts on back and ends accept standard electrical fittings (by others). Consult factory.
- ◆ Surface mountable to a wall or ceiling
- ◆ Pendant or cable mountable
- ◆ Whips, fuses and cord sets. See options page in Buyers' Guide or contact the factory for more.
- ◆ cETL_{us} listed for damp locations

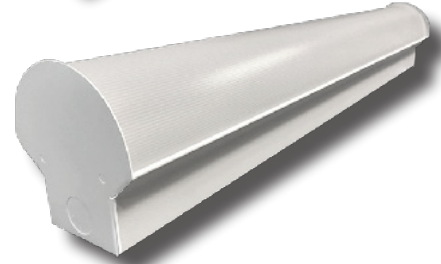

ORDERING DATA

EXAMPLE: LDA24-LED12RFDMVWH40

LDA		LED		RF		Finish		Color Temp		Unoccupied Settings*	
Series	Dimensions	Gear		Diffuser	Driver						
LDA	24 23.6" 48 47.2" 96 94.4"	LED		RF Ribbed Frosted	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	WH White (std) BK Black SL Silver RD Red BN Brushed Nickel	30 3000K 35 3500K 40 4000K 50 5000K			-10 10% -20 20% -30 30% -40 40% -50 50% -60 60% -70 70% -80 80% -90 90%	
Wattage & Lumens											
24 Only											
12	12 Watts	1200 Lumens									
15	15 Watts	1500 Lumens									
20	20 Watts	2000 Lumens									
48 Only											
24	24 Watts	2400 Lumens									
30	30 Watts	3000 Lumens									
40	40 Watts	4000 Lumens									
96 Only											
48	48 Watts	4800 Lumens									
60	60 Watts	6000 Lumens									
80	80 Watts	8000 Lumens									
Options											
HC301WH		Cable kit with 4' cable & power feed w/white canopy									
HC301WH5W		Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)									
HC302WH		Cable kit with 12' cable & power feed w/white canopy									
HC302WH5W		Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)									
EM		Emergency battery pack 10W-1300 Lumens									
OS		Occupancy Sensor									
SSM		Integral Microwave Sensor									

*For Step Dimming Only

Plug in Options: For continuous run applications by simply plugging sections together

- PI1 3 wire harness, including white, black and green
- PI2 4 wire harness, including white, black, green and blue for emergency battery backup
- PI3D 5 wire harness, including white, black, green, violet and gray

**See chart on page 2 for whip & cord ordering options

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE


****Cord & Whip Ordering Chart (Add to End of Fixture Part Number)**

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

DIMENSIONS

Dimensions:

- 3.93"H x 3.79"W x 23.60"L
- 3.93"H x 3.79"W x 47.20"L
- 3.93"H x 3.79"W x 94.40"L

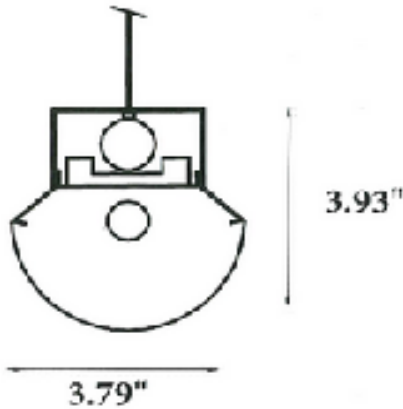

Dimensions and specifications subject to change without notice.



L I G H T I N G

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE