

APPLICATIONS

This LED Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.9" wide features a choice of die-cast end caps (spade standard).


FEATURES & BENEFITS

- ◆ 4 ft. - 7" x 48" x 2.0"
- ◆ 8 ft. - 7" x 96" x 2.0"
- ◆ Die-cast aluminum ends - factory installed, spade style with wing design available
- ◆ Mount with 4' adjustable cable (2 for 4' unit or 8' unit, included)
Consult factory for longer cables.
- ◆ Highest quality long life LED
- ◆ Double the life expectancy of fluorescent technology
- ◆ _CETL_{US} Listed
- ◆ 5 year warranty

SPECIFICATIONS

The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and are factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.

Individual luminaires come with 2 "spade" end caps factory installed and function as a stand alone luminaire. Luminaires can also be combined in long runs joining together starters, runners and ends. Starters and ends have a single "spade" end cap factory installed. Standard feed points are located at the starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.

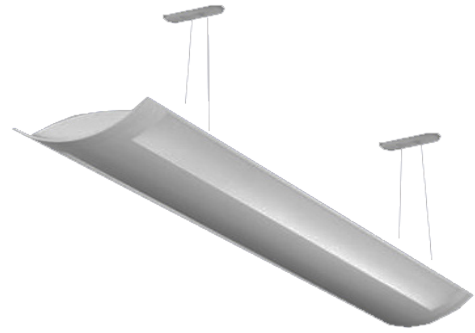

ORDERING DATA

EXAMPLE: LIB48LED1U2D48DMV40SL

LI	LED				DMV					
Series	Length	Gear	Light Distribution	Wattage/Lumens		Driver	Finish	Color Temp		
LI LED Linear Indirect	48 48 inch 96 96 inch	LED	Blank Uplight Only 2U1D 2/3 Uplight by wattage 1/3 Downlight by wattage	48 48W 57 57W H72 72W H85 85W	4000 Lumens 4500 Lumens 5700 Lumens 6550 Lumens	DMV 120-277VAC 0-10V Dimming Multivolt SDMV Step Dimming 120-277VAC 100%-40%	WH White (Std) SL Metallic Silver RD Red IN Iron BK Black BZ Bronze	30 3000K 35 3500K 40 4000K 50 5000K	Configuration	
Body Style				4 Ft.						
Blank	Perforated			97 97W	7900 Lumens					Blank Individual
B	Louver			114 114W	8950 Lumens					-B Beginner Run
S	Matte White Lens			H144 144W	11500 Lumens					-E Ender Run
SD	Solid			8 Ft.						-J Joiner
				4 Ft. Up and Downlight						
				36 36W	2400U-1200D					
				54 54W	3600U-1800D					
				8 Ft. Up and Downlight						
				72 72W	4800U-2400D					
				108 108W	7200U-3600D					

NOTE:

- 4ft cable & 4 ft power feed cable included
- Spade ends are standard. Add BN for bullnose to end of part number

Options

- (Blank) Cable kit with 4' cable & power feed. Cable incl. w/white canopy (3 wire) *non-dimming Bull-Nose
- BN HC302WH Cable kit with 12' cable & power feed. Cable incl. w/white canopy (3 wire) *non-dimming
- HC301WH5W Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire)
- HC302WH5W Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire)

*Consult factory for more options

Plug In Options

- PI1 3 wire harness, including white, black and green
- PI2 4 wire harness, including white, black, green and blue for emergency battery backup
- PI3D 5 wire harness, including white, black, green, violet and gray


Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#	
JOB NAME	
TYPE	

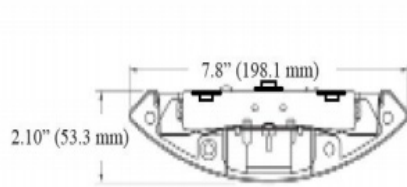

Uplight and Downlight
LED module distribution

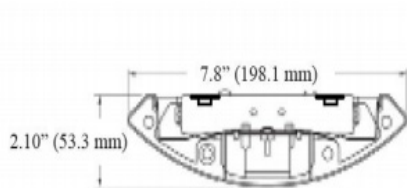

Downlight
LED module distribution

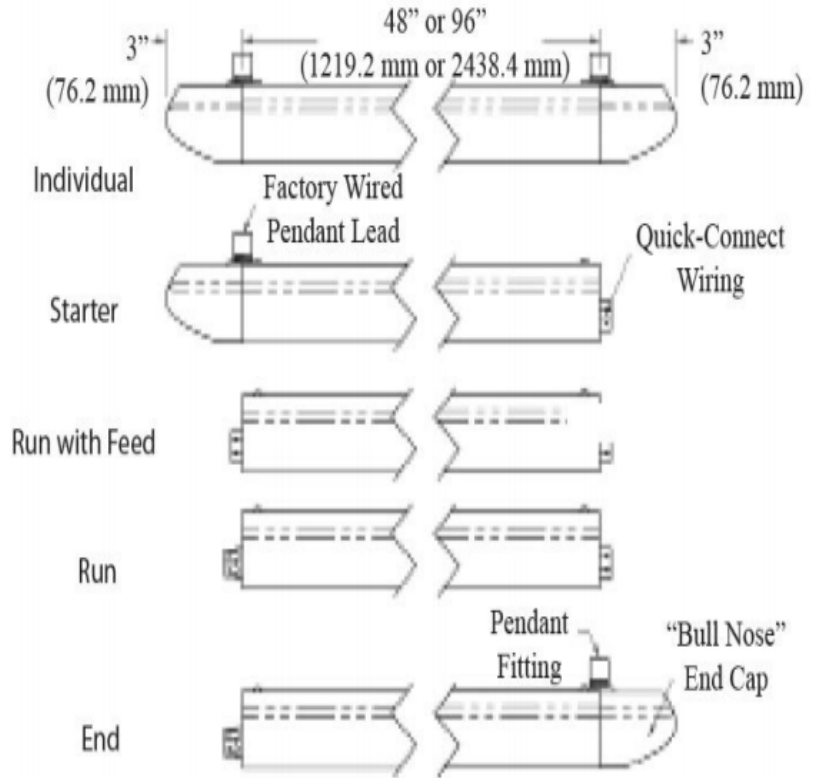

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	