


# MOBERN

L I G H T I N G

## SERIES LPLI

### Low Profile Linear Lighting

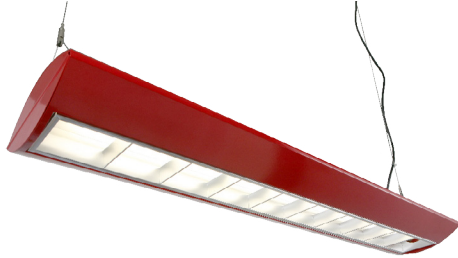

This LPLI Series is a subtle low-profile ellipsoidal pendant luminaire. Available in 96" and 48" modular lengths in individual or row configurations. For cable mounting only. End caps can be added to beginning of row, end of row or both ends of individual units. For continuous row mounting, wiring feeds through enclosed wireway. Sleek, compact, and low profile bullnose silhouette makes a dynamic design statement used individually or in graceful linear runs. When suspended, the Low Profile appears to float in the environment. Ideal for settings requiring generous overall illumination as well as controlled task lighting with the direct/indirect distributions.

- Standard 4' adjustable power cable (2 for 4' unit or 8' unit, included)
- White powder coated 23 gauge steel endcaps
- Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.
- UL listed for damp locations

#### CONSTRUCTION

Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.

#### SIZE W x L x H in inches (mm)

4ft. - 10.8" x 48" x 3.5"

8ft. - 10.8" x 96" x 3.5"

# EZ-LED

#### EZ LED

The most economical, practical and user friendly series of LED fixtures with the energy savings, quality of light, long life and hassle-free maintenance. EZ LED fixtures are UL Listed with the latest LED T8 Bypass lamps. Fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required) and have flexibility to change wattage and color temperature any time. Fixture performance will evolve over time with the evolution of the T8 LED lamp technology. Concerned about maintenance with an LED array and driver fixture, EZ LED solves that by utilizing a self contained LED lamp that fits into fixture just like a fluorescent lamp.

#### Lamp Specifications:

Our T8 LED lamps are available in 2 or 4 ft sizes in different wattage, lumens and color temperature options. See lamp options and specs at [www.mobern.com/EZLEDLamps](http://www.mobern.com/EZLEDLamps).

50,000 Hour Life with 5 Year Warranty  
Aluminum Base and Aluminum Housing with Glass Cover  
Operating Temperature: - 20°C to 50°C  
Color Temperature: 3500K, 4000K, 5000K  
G13 Pins (Same as Fluorescent Linear T8 Bipin)  
AC100 – 277V

#### Emergency Options:

The standard EZ LED Lamps require an inverter or an All-in-one emergency kit that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM it. See emergency options and specs at [www.mobern.com/EZLEDEmergency](http://www.mobern.com/EZLEDEmergency).

ITEM NO.	DESCRIPTION
LPLI-232WHLEDL15W840LUN	48" PLIN 90% DOWN 3700 Lumen 2x15W LED T8 4000K Lamps included w/5 ft cable kit
LPLI-232TANWHLEDL15W840LUN	96" PLIN 90% DOWN 7400 Lumen 4x15W LED T8 4000K Lamps included w/5 ft cable kit

Change 40 to 35 etc. for different Kelvin. Change Lamp Wattage to 15W on 4FT.  
Change WH TO BK (Black), RD (Red), IR (Iron), SL (Silver) or BR (Bronze)



Mobern reserves the right to substitute our own UL DLC listed tubes.

Mobern Lighting

8200 Stayton Dr. Suite 500 Jessup, MD 20794

Phone: 800.444.9288 Fax: 972-247-0200

[www.mobern.com](http://www.mobern.com) email: [sales@mobern.com](mailto:sales@mobern.com)

REV. 06/22/2016

Catalog Number:

Notes: