MBBP LED
LED Square Close-To-Ceiling Fixture

APPLICATIONS

ENERGY STAR® qualified, this fixture is perfect for a wide range of applications. Ideal for light commercial and residential buildings requiring general illumination.

FEATURES & BENEFITS

- ENERGY STAR® qualified
- L_{70} > 50000 hrs
- Dusk to dawn photocell for automatic ON/OFF (optional)
- Celing mount only
- Available in black or white finish
- Molded of durable non-corrosive UV resistant resins with aluminum base
- $_{C}UL_{US}$ Listed for damp locations

ORDERING DATA

EXAMPLE: MBBPLED13D120BKF30

MBBP LED

Series	Gear	Wattage & Lumens	Driver	Finish	Lens	Color Temp	Options
MBBP	**LED**	**13** 13 Watts 1000 Lumens **14** 14 Watts 1400 Lumens **22** 22 Watts 1800 Lumens* **23** 23 Watts 1900 Lumens	**D120** 120V Dimmable **MV** 120-277VAC**	**BK** Black **WH** White	**F** Frosted Polypropylene **G** Clear Glass	**30** 3000K **40** 4000K	**OS** Occupancy Sensor **PC** Photocell

*Only available w/ MV and 4000K

**Only available w/ 22 Watt and 4000K

INC ORDERING DATA

EXAMPLE:MBBP-INCLEDBKF30

MBBP

Series	Socket	Lamp Type*	Finish	Lens	Color Temp*
MBBP	**INC** Incandescent	**LED** 9.5 watt A19/E26 120VAC 800 lamp lumens triac dimmable	**BK** Black **WH** White	**F** Frosted Polypropylene **G** Clear Glass	**30** 3000K **40** 4000K

*Include only when ordering with lamp

*Include only when ordering with lamp

DIMENSIONS

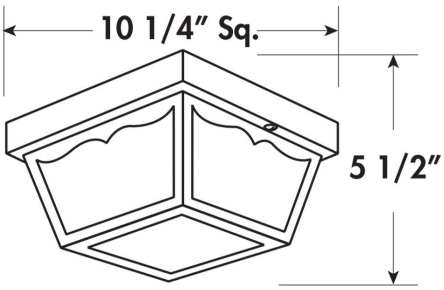

Dimensions and specifications subject to change without notice.

♦ 800-444-WATT ♦ www.mobern.com ♦
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT# | JOB NAME | TYPE

REV 05/01/2018

© 2008-18 Mobern Lighting Company