

### FEATURES & BENEFITS



- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (105°F)
- ◆ Estimated 50,000 HRS L<sub>70</sub>
- ◆ Thermally protected LED array
- ◆ Fitter neck acrylic diffuser
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ UL/cUL Listed for wet location
- ◆ 5 year warranty on 13D120
- ◆ 3 year warranty on 11MV



### ORDERING DATA

EXAMPLE: MBPWLED11MV40WSJ

Series	Body	Gear	Wattage/Driver	Kelvin Temperature	Diffuser	Options
<b>MBP</b> Pocket LED	<b>W</b> White <b>B</b> Black	<b>LED</b>	<b>11MV</b> 11Watt Multivolt 120-277VAC <b>13D120</b> 13Watt D120Volt Triac Dimmable	<b>30</b> 3000K* <b>40</b> 4000K <small>*only available in 13D120</small>	<b>WSJ</b> White Small Jar <b>CSJ</b> Clear Small Jar <b>AG</b> Clear Globe	<b>PC</b> Photocell** <small>**only available in 13D120</small>

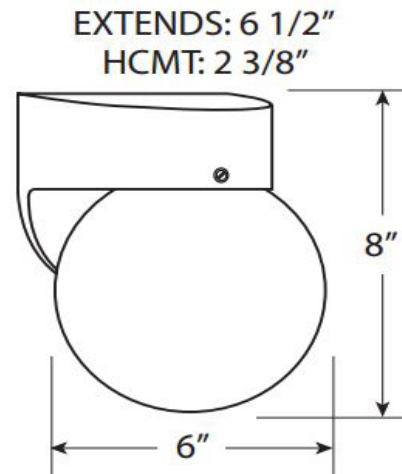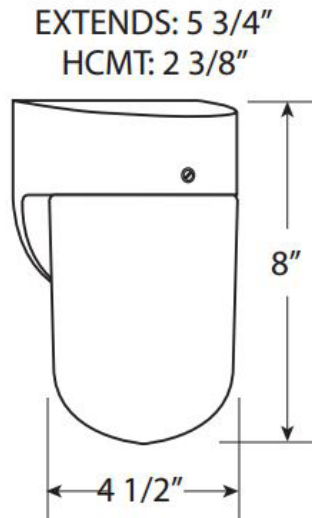

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 100, Laurel, MD 20723

CAT#	
JOB NAME	
TYPE	