

FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (104°F)
- ◆ L₇₀ > 50000 hrs.
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ Post top version fits most 3 inch diameter posts (not included)
- ◆ cUL_{us} Listed for wet locations
- ◆ Energy Star Listed in wall mounted versions
- ◆ 5 year warranty




ORDERING DATA

EXAMPLE: MBRPLED12D120WHCL30

MBR	LED	12	D120					
Series	Mount	Gear	Wattage / Lumens	Driver	Finish	Lens	Color Temp	Options
MBR	P Post Top W Wall Mount L Wall Mount Long Tail	LED	12 13 Watts 1000 Lumens	D120 120VAC Triac Dimmable	WH White BK Black	WH White CL Clear FR Frosted	30 3000K 40 4000K	PC Photocell*

*Photocell Not Available on Post Top

DIMENSIONS

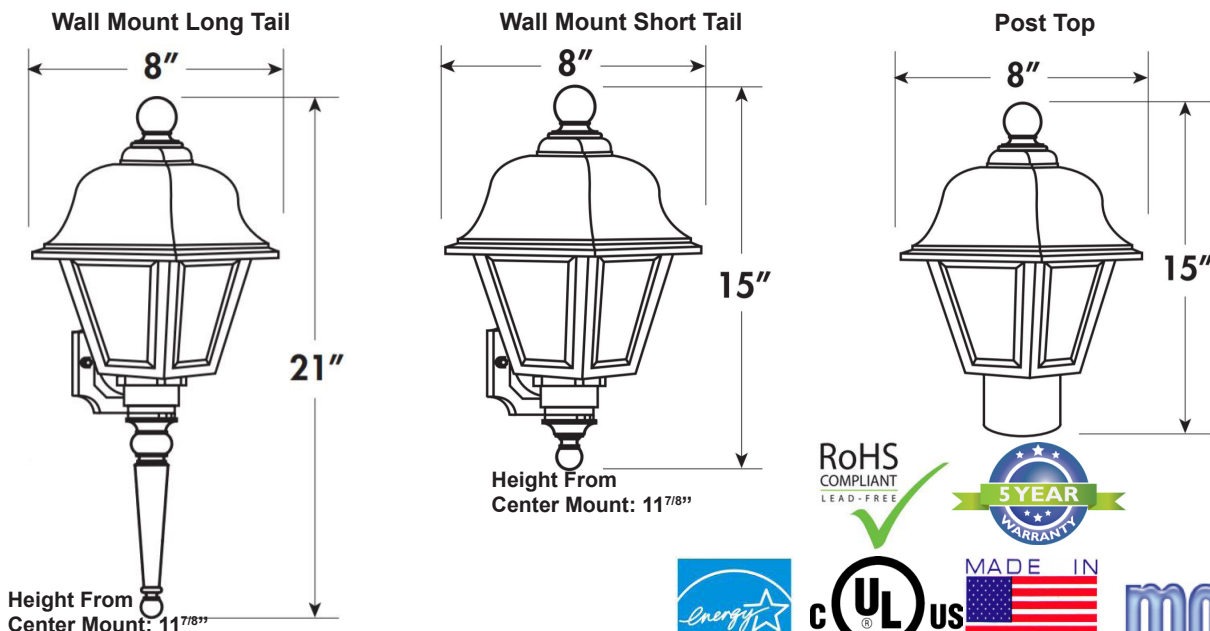

Height From Center Mount: 11^{7/8"}

Dimensions and specifications subject to change without notice.

RoHS COMPLIANT
LEAD-FREE



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	