

FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C to +40°C
- ◆ L₇₀ > 50000 hrs.
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ Post top version fits most 3 inch diameter posts (not included)
- ◆ cUL_{us} Listed for wet locations
- ◆ Energy Star Listed in wall mounted versions



ORDERING DATA

EXAMPLE: MBRPLED12D120WHCL30

MBR	LED	12	D120					
Series	Mount	Gear	Wattage / Lumens	Driver	Finish	Lens	Color Temp	Options
MBR	P Post Top W Wall Mount L Wall Mount Long Tail	LED	12 13 Watts 1000 Lumens	D120 120VAC Triac Dimmable	WH White BK Black	WH White CL Clear FR Frosted	30 3000K 40 4000K	PC Photocell* <small>*Photocell Not Available on Post Top</small>


ORDERING DATA

EXAMPLE: MBRWINCLEDWHFR40


Series	Mount	Socket	Lamp Type (optional)	Finish	Lens	Color Temp (Optional)	Options
MBR Bradford Collection	P Post Top W Wall Mount L Wall Mount Long Tail	INC Incandescent* <small>*60W Max</small>	LED 9.5 watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable	BK Black WH White	WH White CL Clear FR Frosted	30 3000K 40 4000K	PC Photocell* <small>*Photocell Not Available on Post Top</small>

DIMENSIONS


Wall Mount Long Tail

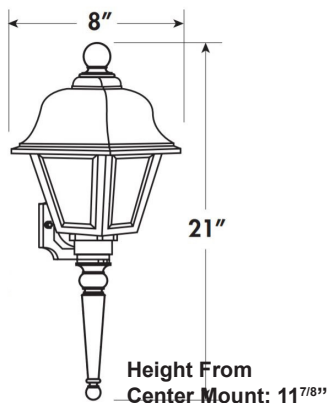

Wall Mount Short Tail

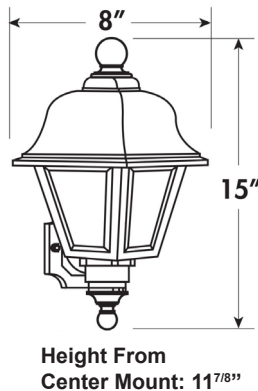

Post Top

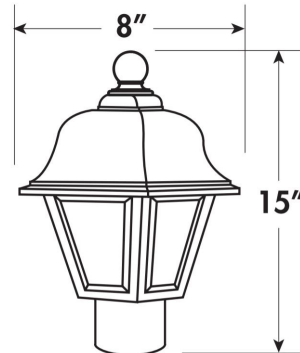

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE