

FEATURES & BENEFITS

- ◆ 120V input voltage, 50/60 Hz
- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (122°F)
- ◆ Wall mount only
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ ^cUL_{us} listed
- ◆ 5 year warranty



ORDERING DATA

EXAMPLE: MDH5-LED13D120BKWH30

MDH								
Series	Size	Gear	Wattage / Lumens	Driver	Finish	Lens	Color Temp	Options
MDH	5 5 inch	LED	13 13 Watts 1000 Lumens	D120 120V Dimmable	BK Black	WH White	30 3000K 40 4000K	PC Photocell

ORDERING DATA FOR LED A LAMP


EXAMPLE: MDH5INCLEDBKWH30

MDH							
Series	Size	Socket	Lamp Type (Optional) ¹	Finish	Lens	Color Temp (Optional) ²	Options
MDH	5 5 inch	INC Incandescent	LED 9.5 watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable	BK Black	WH White	30 3000K 40 4000K	PC Photocell

¹Must include color temperature

²Must include LED Lamp Type

DIMENSIONS

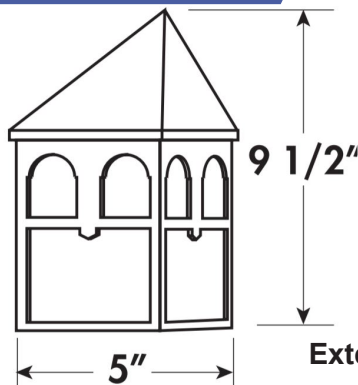

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE