

APPLICATIONS

The SFK8 is a Commercial grade, DoB, AC Direct LED, Recessed Downlight Retrokit with integral one piece housing and mouse-trap spring clips to allow for easy installation. It is compatible with most 8" commercial housings measuring at least 6-7/8" high, with apertures between 8" and 8-3/4". Available with a 15W, 20W, 30W or 40W, high efficacy Universal voltage, DoB LED module with Triac and 0-10V dimming. The optical diffuser produces high lumen transmission and even illumination. Also use for remodeling down lights in existing ceiling, adding a J-box on conduit end. (Sold separately.)

FEATURES & BENEFITS

- ◆ Heavy gauge, painted aluminum reflector allows for efficient heat dissipation.
- ◆ Designed to retrofit most existing 8"- 8-3/4" aperture commercial incandescent, fluorescent and metal halide housings.
- ◆ Easy, quick connect, metal connector case allows for easy wire connection. (U.S. Patented)
- ◆ Universal 120-277VAC DoB LED module with dual dimming of Triac and 0-10V in one module.
- ◆ White coated paint is standard. Consult factory on other finish colors.
- ◆ Optional Remodel Junction Box is available for remodeling down lights.





ORDERING DATA

EXAMPLE: MDLED-SFK815827WH

Series	Watts	CRI	Color Temperature	Reflector/Trim Finish	Options
MDLED-SFK8	15	8	27	WH	EM
	20	9	30	HC	RJB
	30		35		NCFK8
	40		40		
	15 Watts	80CRI	2700K	White	Emergency battery back-up
	20 Watts	90CRI	3000K	Haze Clear	Remodel Junction Box
	30 Watts		3500K		New construction fram kit
	40 Watts		4000K		

DIMENSIONS

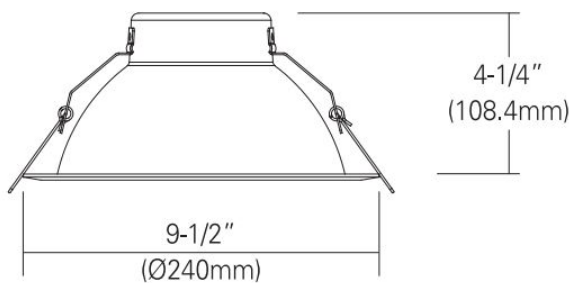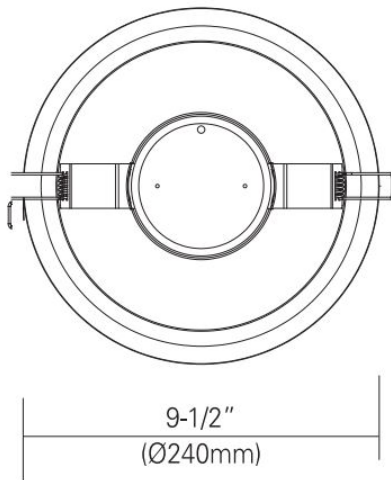

- Easy-quick connector case.
- New Construction Frame Kit
- Remodel Junction Box

Ceiling Cut-out : 8-1/4"

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE