

FEATURES & BENEFITS

ILLUMINATION

- ◆ Ultra bright, energy efficient, long life Red or Green

ELECTRICAL

- ◆ Dual 120V/277 voltage
- ◆ Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- ◆ 1.2V long life, maintenance-free, rechargeable NiCd battery
- ◆ Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- ◆ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- ◆ EZ-snap thermoplastic mounting canopy included for top or end mount
- ◆ Universal K/O pattern on back plate for wall mount

HOUSING

- ◆ Injection molded engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- ◆ Aesthetically pleasing, curved face, rounded corner design
- ◆ EZ snap-out chevron directional indicators



WARRANTY / LISTING

- ◆ Five year warranty on all electronics and housing. Battery prorated for five years
- ◆ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ◆ UL Listed for damp locations (0°C - 50°C)


ORDERING DATA

EXAMPLE: MEBEZRXTU1RW

MEBEZRXTU

Series	# of Faces	Letter Color	Housing Color	Operation
MEBEZRXTU	1 Single Face 2 Universal Single/Double Face	R Red G Green	W White B Black	(Blank) AC Only EM Emergency Battery Backup

DIMENSIONS

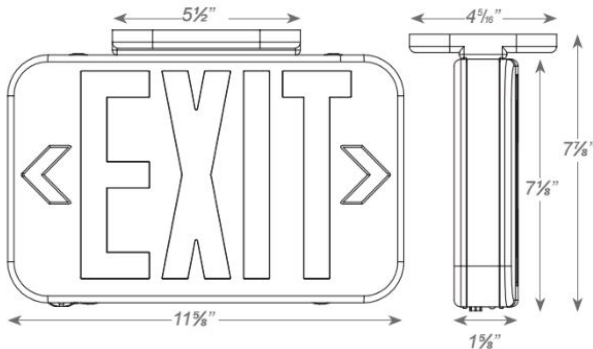

Dimensions and specifications subject to change without notice.

