

**FEATURES & BENEFITS**

- ◆ Charge rate/power "On" LED indicator light and push-to-test switch for mandated code compliance testing
- ◆ Available in red and green LED
- ◆ 2.4V long life, maintenance-free, rechargeable NiCd battery
- ◆ Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- ◆ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- ◆ Aluminum mounting canopy included for top or end mount
- ◆ Universal K/O pattern on back plate for wall mount
- ◆ Premium-grade, aluminum housing (also available in black or white powder-coated finishes)
- ◆ Field selectable knockout chevron directional indicators
- ◆ Quick-snap face plate closure
- ◆ Specification-grade, low profile thin aluminum die-cast design
- ◆ Available specifically in single or double face only
- ◆ Five year warranty on all electronics and housing. Battery pro rated for five years
- ◆ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ◆ UL listed for damp locations (0°C - 50°C)




**ORDERING DATA**

EXAMPLE: MEBKZXTEU1RWA

Series	# of Faces	Letters	Housing Color	Face Color	Operation
MEBKZXTEU	1 Single Face 2 Double Face	R Red Letters G Green Letters	W White Housing B Black Housing A Aluminum Housing	A Brushed Aluminum B Black W White	(Blank) AC only EM Emergency Battery Backup

**Dimensions**

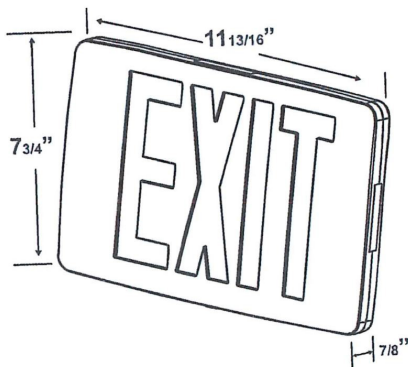

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE