

FEATURES & BENEFITS

ILLUMINATION

- ◆ Ultra-Bright, energy efficient, long life Red or Green LED
- ◆ UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- ◆ Double face utilizes factory installed sliver or white mylar background panel.

ELECTRICAL

- ◆ Dual 120/277 voltage
- ◆ Unique bi-color Led Indicator light alerts occupant on a normal battery condition (Green-OK, Red-Battery Dead or disconnected)
- ◆ Push to test switch for mandated code compliance testing
- ◆ Long-life maintenance-free, rechargeable NiCd battery
- ◆ Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- ◆ Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- ◆ Ez-snap mounting canopy included for top, end or back mount

HOUSING

- ◆ Injection-molded, engineering-grade 5Va, flame retardant high-impact resistant thermoplastic housing in white or black finish
- ◆ Self-adhesive chevron appliques and guide template provided for directional indication




OPTIONS

- ◆ Custom: Signs available with requested "special" wording
- ◆ SDT: Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes
- ◆ 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY

- ◆ Five year warranty on all electronics and housing. Battery is pro-rated for five years.
- ◆ Meets UL924, NFPA 101 Life Safety, NEC, OSHA, Local and State Codes
- ◆ UL listed for damp locations

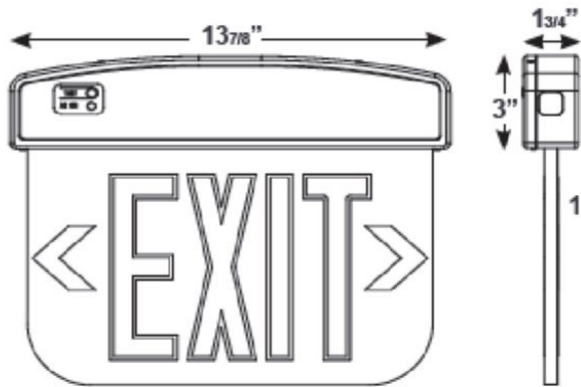

ORDERING DATA

EXAMPLE: MEBPELXWRMA1

MEBPELX

Series	Housing	Letter Color	Panel	Battery	Face Plate	Options
MEBPELX	W White B Black S Silver	R Red G Green	C Clear ¹ M Mirror W White	A AC Only B Battery	1 Single Face 2 Double Face	CUSTOM Custom Wording SD Self Diagnostics ² SPV 208/220/240 Volt, 50/60Hz ³ 2C Dual Circuit ⁴

Notes:

- ¹With single face only
- ²Available in EM units only
- ³Not available with SD
- ⁴Available in AC units only

Dimensions and specifications subject to change without notice.