

FEATURES & BENEFITS

- ◆ Fade and rust resistant composite construction
- ◆ Operating temperature -40°C to +40°C
- ◆ Available in black, white, or bronze
- ◆ Post top fits most 3 inch diameter posts (not included)
- ◆ Optional photocell for wall mount 120V only
- ◆ L₇₀ > 50,000 hrs.
- ◆ Min CRI 80
- ◆ 5 year warranty
- ◆ cUL_{us} listed for wet locations



ORDERING DATA

EXAMPLE: MHZP9-LED13D120WHCL40

Series	Size	Wattage / Lumens	Driver	Finish	Lens	Color Temp	Options
MHZ	9 9 inch	13 13 Watts 1280 Lumens	D120 120V Triac Dimmable	WH White BK Black BZ Bronze	CL Clear FR Frosted	30 3000K 40 4000K	PC Photocell (Wall Mount Only)
Mount	Gear LED						
P Post Top W Wall Mount							

ORDERING DATA FOR LED A LAMP

EXAMPLE: MHZP9INCLEDWHCL40

Series	Size	Socket	Lamp Type (Optional) ¹	Finish	Lens	Color Temp (Optional) ²	Options
MHZ	9 9 inch	INC Incandescent	LED 9.5 watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable (60W MAX)	WH White BK Black BZ Bronze	CL Clear FR Frosted	30 3000K 40 4000K	PC Photocell (Wall Mount Only)
Mount							
P Post Top W Wall Mount							

¹Must include color temperature

²Must include LED Lamp Type

Dimensions and specifications subject to change without notice.



800-444-WATT ♦ www.mobern.com ♦


8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

DIMENSIONS

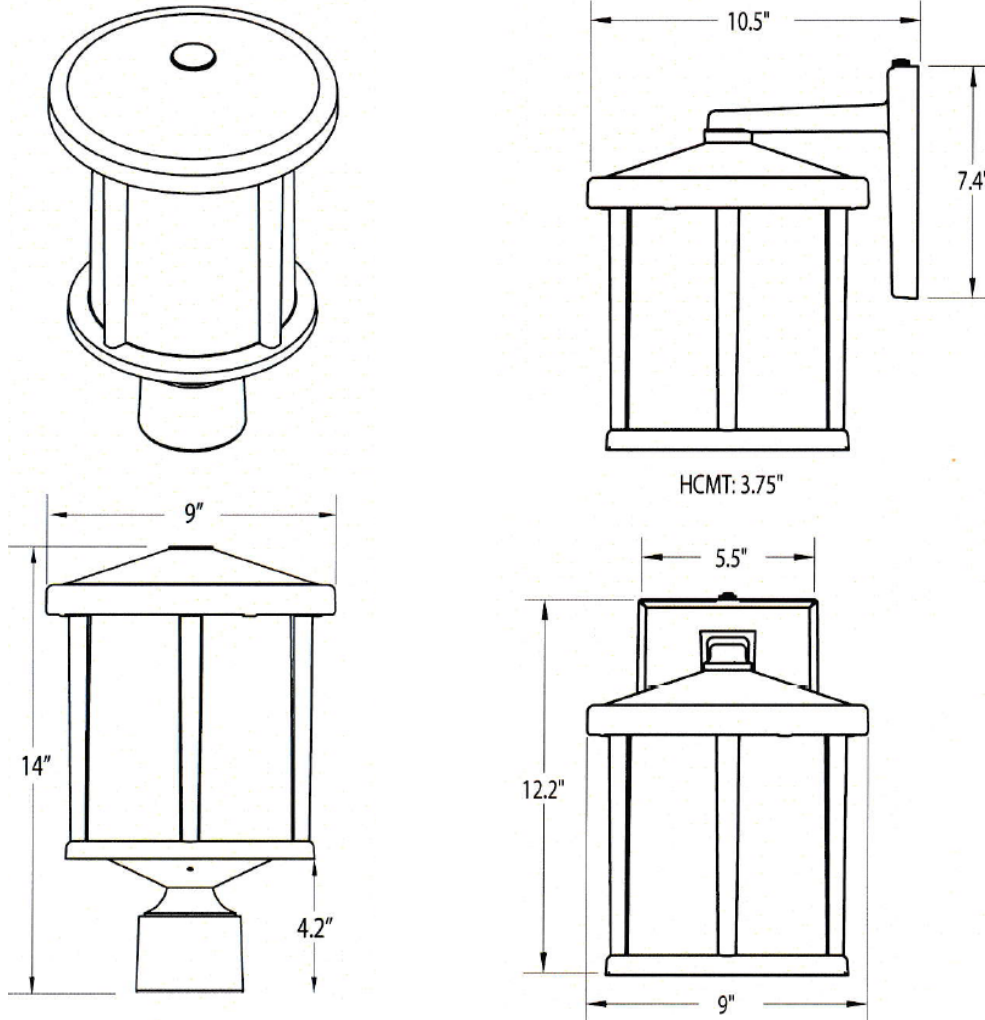

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	